

PTO/PCT Rec'd 29 MAR 2001

PTO/PCT Rec'd 29 MAR 2001

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Inventor(s): Guizeng SHI et al.

Group Art Unit:

Application No.: 09/763,163

Examiner:

Filed: February 16, 2001

For: WIRELESS COMMUNICATION APPARATUS AND  
WIRELESS COMMUNICATION METHOD

**DECLARATION UNDER 37 CFR § 1.47(b)**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

I, Osamu Kato, do hereby solemnly and sincerely declare that:

1. I have acted on behalf of Matsushita Electric Industrial Co., Ltd. in attempting to secure the signature of joint inventor Guizeng Shi on a Declaration Under 37 CFR § 1.63 and Assignment associated with the above-identified application.
2. U.S. Application No. 09/763,163, the subject of this Declaration, which is the U.S. national stage filing of PCT international application number PCT/JP00/03874, claims priority from Japanese Appln. No. 11-178737 filed June 24, 1999 (see Exhibit A – Applicants' Claim for Priority filed February 16, 2001, and Exhibit B - PCT/IB/304 Notification Concerning Submission or Transmittal of Priority Document).
3. Proof of the proprietary interest of Matsushita Electric Industrial Co., Ltd. in the present application is established by the attached Exhibit C- a copy of an Assignment executed by the other



DECLARATION UNDER 37 CFR § 1.47(b)  
U.S. Application No. 09/763,163

two co-inventors of the present application, assigning their entire right, title and interest in the invention and all applications for patent and Letters Patent therefore to Matsushita Electric Industrial Co., Ltd.

4. On March 31, 2000, Guizeng Shi left the employ of Matsushita Electric Industrial Co., Ltd. His last known address is 4-4-18-104, Midori-cho, Akishima-shi, Tokyo 196-0004 JAPAN.

5. On February 16, 2001, I wrote to Guizeng Shi by registered mail and enclosed the following documents (see Exhibit D):

Declaration for Patent Application for the above-captioned application

Assignment for the above-captioned application

Cover letter requesting that Mr. Shi sign and date each of the documents as indicated, and return the originals to Matsushita Electric Industrial Co., Ltd.

6. My correspondence of February 16, 2001 to Mr. Shi was forwarded by registered mail return receipt (see Exhibits E and F – Japanese-language Registered Record of Delivery with English-language annotation of Registered Record of Delivery).

7. Exhibits E and F show that the mail was returned to sender after a one-week custodial period due to absence of the recipient.

9. To date, despite the diligent efforts of both Matsushita Electric Industrial Co., Ltd. and the undersigned, Guizeng Shi has not complied with the above-identified request to sign the Declaration Under 37 CFR § 1.63 for the present application.



DECLARATION UNDER 37 CFR § 1.47(b)  
U.S. Application No. 09/763,163

10. Proof of irreparable damage to Matsushita Electric Industrial Co., Ltd. is established by the fact that the grant of a filing date under 35 U.S.C. § 371 is necessary to establish a claim for priority associated with Japanese Appln. No. 11-178737 filed June 24, 1999:

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Respectfully submitted,

*Osamu Kato*

Osamu Kato

Date: March 14, 2001



Exhibit A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Inventors: Guizeng SHI et al.

Application No.: New PCT Application

Filed: February 16, 2001

For: WIRELESS COMMUNICATION APPARATUS AND WIRELESS  
COMMUNICATION METHOD

CLAIM FOR PRIORITY

Assistant Commissioner of Patents  
Washington, D.C. 20231

Dear Sir:

The benefit of the filing date of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified application and the priority provided in 35 USC 119 is hereby claimed:


Japanese Appln. No. 11-178737, Filed: June 24, 1999.

The International Bureau received the priority document within the time limit, as evidenced by the attached copy of the PCT/IB/304.



It is requested that the file of this application be marked to indicate that the requirements of 35 USC 119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

Respectfully submitted,



James E. Ledbetter  
Registration No. 28,732

Date: February 14, 2001

JEL/clw

Attorney Docket No. L9289.01113 PCT

STEVENS DAVIS, MILLER & MOSHER, L.L.P.  
1615 L STREET, NW, Suite 850  
P.O. Box 34387  
WASHINGTON, DC 20043-4387  
Telephone: (202) 408-5100  
Facsimile: (202) 408-5200



PATENT COOPERATION TREATY

PCT

RECEIVED

From the INTERNATIONAL BUREAU

SEP - 7, 2000

WASHIDA & ASSOCIATES(2)

NOTIFICATION CONCERNING  
SUBMISSION OR TRANSMITTAL  
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

WASHIDA, Kimihito  
5th Floor, Shintoshicenter Bldg.  
24-1, Tsurumaki 1-chome  
Tama-shi, Tokyo 206-0034  
JAPON

Date of mailing (day/month/year) 28 August 2000 (28.08.00)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference 2F00091-PCT	
International application No. PCT/JP00/03874	International filing date (day/month/year) 15 June 2000 (15.06.00)
International publication date (day/month/year) Not yet published	Priority date (day/month/year) 24 June 1999 (24.06.99)
Applicant MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. et al	

1. The applicant is hereby notified of the date of receipt (except where the letters "NR" appear in the right-hand column) by the International Bureau of the priority document(s) relating to the earlier application(s) indicated below. Unless otherwise indicated by an asterisk appearing next to a date of receipt, or by the letters "NR", in the right-hand column, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
2. This updates and replaces any previously issued notification concerning submission or transmittal of priority documents.
3. An asterisk(\*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b). In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
4. The letters "NR" appearing in the right-hand column denote a priority document which was not received by the International Bureau or which the applicant did not request the receiving Office to prepare and transmit to the International Bureau, as provided by Rule 17.1(a) or (b), respectively. In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
24 June 1999 (24.06.99)	11/178737	JP	04 Augu 2000 (04.08.00)

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No. (41-22) 740.14.35</p>	<p>Authorized officer</p> <p>Sean Taylor</p> <p>Telephone No. (41-22) 338.83.38</p>
---	---



USA  
ASSIGNMENT OF PATENT APPLICATION

*Exhibit C*

- (1) Guizeng SHI  
(2) Osamu KATO  
(3) Mitsuru UESUGI  
(4) \_\_\_\_\_  
(5) \_\_\_\_\_

In consideration of the sum of one dollar (\$1.00) and other good and valuable consideration paid to each of the undersigned, the undersigned agree(s) to assign, and hereby does assign, transfer and set over to

- (6) MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
(6a) of 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 JAPAN  
(7) \_\_\_\_\_  
(7a) of \_\_\_\_\_

(hereinafter designated as the Assignee) the entire rights, title and interest for the United States, its territories, dependencies and possessions, and for the country of

- (8) \_\_\_\_\_ in the invention, and all applications for patent and any Letters Patent which may be granted therefor, known as

- (9) WIRELESS COMMUNICATION APPARATUS AND  
WIRELESS COMMUNICATION METHOD (Case No. \_\_\_\_\_)

for which the undersigned has (have) executed on even date herewith an application for patent in the United States of America or, if not on even date, then has executed

- (10) on \_\_\_\_\_ or has already filed  
(11) U.S. appln. Serial No. 09/763,163, filed on February 16, 2000 /

- (12) The undersigned acknowledges an obligation of assignment of this invention to said assignee at the time the invention was made.

- 1) The undersigned agree(s) to execute all papers necessary in connection with the application and any continuing or divisional applications thereof and also to execute separate assignments in connection with such applications as the Assignee may deem necessary or expedient.  
2) The undersigned agree(s) to execute all papers necessary in connection with any interference which may be declared concerning this application or continuation or division thereof and to cooperate with the Assignee in every way possible in obtaining such evidence and going forward with such interference.  
3) The undersigned agree(s) to execute all papers and documents and perform any act which may be necessary in connection with claims or provisions of the International Convention for Protection of Industrial Property or similar agreements.  
4) The undersigned agree(s) to perform all affirmative acts which may be necessary to obtain a grant of a valid United States patent to the Assignee.  
5) The undersigned hereby authorize(s) and request(s) the Commissioner of Patents to issue any and all Letters Patent of the United States resulting from said application or any division or divisions or continuing applications thereof to the said Assignee, as Assignee of the entire interest, and hereby covenants that he has (they have) full right to convey the entire interest herein assigned, and that he has (they have) not executed and will not execute, any agreement in conflict herewith.  
6) The undersigned hereby grant(s) the firm of STEVENS, DAVIS, MILLER & MOSHER, L.L.P. the power to insert on this assignment any further identification which may be necessary or desirable to comply with the rules of the United States Patent Office for recordation of this document.

In witness whereof, executed by the undersigned on the date(s) opposite the undersigned signature(s).

Date \_\_\_\_\_ Signature of Inventor (1) \_\_\_\_\_ (Seal)  
Date March 14, 2001 Signature of Inventor (2) Osamu Kato (Seal)  
Date March 14, 2001 Signature of Inventor (3) Mitsuru Uesugi (Seal)  
Date \_\_\_\_\_ Signature of Inventor (4) \_\_\_\_\_ (Seal)  
Date \_\_\_\_\_ Signature of Inventor (5) \_\_\_\_\_ (Seal)

This assignment should preferably be signed before: (a) a Notary Public if within the U.S.A., or (b) a U.S. Counsel if outside the U.S.A. If neither, then it should be signed before at least two witnesses who also sign here:

Date \_\_\_\_\_ Signature of Witness \_\_\_\_\_ (Seal)  
Date \_\_\_\_\_ Signature of Witness \_\_\_\_\_ (Seal)



*Exhibit D*

(English Annotation)

**MEMORANDUM**

February 16, 2001

To: Mr. Guizeng SHI

**Request for Seal**

Our Ref. Nos. P22338, P22340

Please seal the enclosed Declaration and Assignment for filing foreign patent applications and return the same to us as soon as possible.

\* These documents are very important. Please seal the forms and return to us urgently. If there is any reason why you can't return the documents, please let us know by telephone or E-Mail.



'01年03月06日(火) 14時39分 宛先: 監田持許

発信: 松下通信工業 技術本部 総務部 YRP

R:604

P.02/02

P 22338

P 22340

E-mail → [tomaru@yjp.co.jp](mailto:tomaru@yjp.co.jp)

## 社内連絡票

H13年2月16日

宛先(事業場名) To 殿	発信 内線 (5553) 企画管理部 技術管理課	責任者 村田	担当 名嶋
★下記の件について 連絡. 報告. 手配. 実施. 検討. 依頼. 照会. 回答. 借用. 返却. 送付 します(願います).		添付書類 なし あり ( 枚)	
<p>件 名 捺印のお願い &amp; サイン</p> <p>外国出願の手続を行う関係上、添付の委任状の氏名右横に捺印の上、 月 日 ( ) までに 技術管理課 名嶋 までご返送ください。 → 至急!!</p> <p>※ 重要な書類です。必ずサインと捺印後返送して下さい。以上 今までの書類も同様です。よろしくお願い致します。 何か返送できない理由があるのなら、TELでもEメールでも構いませんので ご返信下さい。</p>			



**APPLICATION FOR UNITED STATES PATENT**  
**Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: \_\_\_\_\_

the specification of which \_\_\_\_\_ 2 (file no. \_\_\_\_\_ )

(check at least one)      3 ☒ is attached hereto  
4 ☐ was filed on \_\_\_\_\_ as (5) U.S. Application Serial No. \_\_\_\_\_  
6 ☐ and was amended \_\_\_\_\_  
(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input checked="" type="checkbox"/>	was filed as PCT international application
	8	Number <u>PCT/IP00/03874</u>
	9	on <u>June 15, 2000</u>
		and was amended under PCT Article(s) 19 and/or 34
	10	on _____ (if applicable).

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119 Priority Claimed

11a	<u>JAPAN</u> (Country)	<u>JP11-178737</u> (Number)	<u>24/06/1999</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

☐ Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

11b	_____	_____	_____	_____
	Application No.	Day/Month/Year Filed	Application No.	Day/Month/Year Filed

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	13 _____ (U.S. Application Number)	_____ (U.S. Filing Date)	_____ Status (patented, pending, abandoned)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO  
STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036,  
TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines



# INSTRUCTIONS FOR COMPLETION OF THIS FORM

line 1 Insert the same title as is used on the specification and in the assignment.

line 2 Is optional but is provided so that you can use it to identify more readily an application prior to the time that the Patent Office application serial number is assigned. We suggest that the specification, drawings and declaration always bear a file number since it can help to get the papers together in case they become inadvertently separated. In instances where the specification is filed without a signed declaration form (under 37 CFR §1.53) a file number on a later-received separate form will assist us in associating it with the correct case.

line 3 Check this box if the specification, claims and drawing (if any) are attached to this declaration form, e.g., when filing a new patent application.

lines 4-5 Are only used in an instance where the application is already on file and the declaration from is being separately filed, e.g., when the application was originally filed without a signed declaration or where the Patent Office has required a new declaration because of a deficiency in the original declaration. In such an instance the Patent Office will require that lines 4 and 5 be completed with the filing date and application serial number already assigned.

line 6 Is used in conjunction with line 5 but only when there have been one or more amendments to the specification or claims. Line 6 is also used when the Examiner requires a new declaration because claims inserted by amendment cover subject matter not originally claimed (37 CFR §1.67).

lines 7-10 Are for PCT (Patent Cooperation Treaty) cases and are used only when you are entering the U.S. National phase (Chapter I or II) based upon a previously filed PCT International application designating the U.S.

line 7 Check this box if this is a PCT National Phase application.

line 8 Insert PCT International application number.

line 9 Insert date of filing of PCT International application.

lines 10 Insert the date of all amendments filed in the PCT International application. Such amendments are optional, so this line at times will not be used.

line 11a Is used in the following instances:

- (i) If a single priority is being claimed from a foreign application you need to list only the first-filed application; you do not need to list other countries if all applications were filed within one year of the U.S. filing.
- (ii) If multiple priorities are being claimed, from a plurality of applications filed in one or more countries, you must list the first filed application for each aspect of the invention. Example: if aspect A of the invention was disclosed in an application filed 11 months earlier in country X and aspect B was disclosed 9 months earlier in an application filed in country Y, then the applications in both countries X and Y must be identified. Only the first application for each aspect of the invention needs to be identified provided all applications on that aspect were filed within one year prior to the U.S. filing.
- (iii) If a non-priority application is being filed you must list all applications in all countries where corresponding foreign applications were filed more than one year prior to the U.S. filing. This is so the Examiner can check to see if any of those applications were published or patented early enough to be prior art against the U.S. application.
- (iv) If there are more than two applications to be listed we suggest that you type in on this form only "See attached Schedule A" and then list all of the previous applications on an attached sheet.

line 11b Is used to claim priority under 35 USC §119(e) based on a provisional application filed within one year of the filing of the instant application. More than one provisional application may be identified provided neither was filed more than one year earlier.

line 12 This block is used only in instances where there is a previously filed U.S. non-provisional application which was copending at the time the present application was (or is being) filed. That previous application could be a U.S. non-provisional application or the National Phase of a PCT allocation. In such a case the present application may be entitled to the priority of the previous application's U.S. filing date (and consequently the foreign priority thereof) provided the present application is identified as a continuing application (continuation, divisional or continuation-in-part) of the earlier (parent) application. If the foregoing is applicable, please fill in one line for each such prior application.

line 13 Type the inventor's proper legal name in the order specified, e.g., "John B. JONES" or "J. Bob JONES" if the inventor so prefers. It is not acceptable to use only initials such as "J. B. JONES."

line 14 The inventor's "signature" may be his (or her) usual manner of signing but it is preferable that the inventor simply write his (or her) name in his (or her) own cursive handwriting in the same order as on line 14, e.g., given name, middle initial and Family name.

line 15 Insert the actual date of signature.

line 16 Insert simply the city and state or country, e.g., "Paris, France", of the inventor's residence, not citizenship. No street address or postal code is required on this line.

line 17 Insert the inventor's citizenship. The statement of citizenship (or subject of) is a statutory requirement (35 USC §115). Simply the name of the country of citizenship, e.g., "Japan" is sufficient.

line 18 Insert the inventor's mailing address. The purpose of requiring the post office address is to enable the Patent Office to communicate directly with the inventor if desired, such as in the case of death of the U.S. attorney. It should be the address where the inventor customarily receives his (or her) mail and should include the postal code. If applicable it can be the inventor's business address or address at place of employment.

Applicants are reminded that the U.S. Patent and Trademark Office has very strict requirements as to proper execution of an application. The applicant should make sure that he reviews the declaration, prior to signing to make sure the declaration properly identifies the application and all relevant information; and should review the specification and claims (including drawings, if any) before signing the declaration. Failure to do so will require the filing of a supplemental declaration --- 37 CFR §1.67(c).

Any handwritten changes to the specification, claims or drawings must be in ink personally by all of the inventors prior to signing the declaration and the adjacent left margin must be initialed and dated by all of the inventors, e.g., "JBJ 6-9-91".

Please let us know if there are any questions regarding proper completion of this form. Thank you.

An assignment, a separate document requiring separate signature and dating may be enclosed. Please look for it and sign and date it in the same manner as in lines 15 and 16 above.



**STEVENS, DAVIS, MILLER & MOSHER, L.L.P.**

I hereby declare that all statements made herein by my own knowledge are true and that all statements made by me are true to the best of my information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

**PAGE 2 OF U.S.A. DECLARATION FORM**

13a	Typewritten Full Name of Sole or First Inventor	<u>Guizeng</u>	<u>SHI</u>
		Given Name	Family Name
14a	Inventor's Signature		
15a	Date of Signature	<u>          </u>	<u>          </u>
		Month	Year
16a	Residence	<u>Akishima-shi</u>	<u>Tokyo</u>
		City	State or Province
			Country
17a	Citizenship	<u>China</u>	
18a	Post Office Address (Insert complete mailing address, including country)	<u>4-4-18-104, Midori-cho,</u>	
		<u>Akishima-shi, Tokyo 196-0004 JAPAN</u>	
13b	Typewritten Full Name of Sole or Second Inventor	<u>Osamu</u>	<u>KATO</u>
		Given Name	Family Name
14b	Inventor's Signature		
15b	Date of Signature	<u>          </u>	<u>          </u>
		Month	Year
16b	Residence	<u>Yokosuka-shi</u>	<u>Kanagawa</u>
		City	State or Province
			Country
17b	Citizenship	<u>Japan</u>	
18b	Post Office Address (Insert complete mailing address, including country)	<u>5-45-G302, Shonantakatori,</u>	
		<u>Yokosuka-shi, Kanagawa 237-0066 Japan</u>	
13c	Typewritten Full Name of Sole or Third Inventor	<u>Mitsuru</u>	<u>UESUGI</u>
		Given Name	Family Name
14c	Inventor's Signature		
15c	Date of Signature	<u>          </u>	<u>          </u>
		Month	Year
16c	Residence	<u>Yokosuka-shi</u>	<u>Kanagawa</u>
		City	State or Province
			Country
17c	Citizenship	<u>Japan</u>	
18c	Post Office Address (Insert complete mailing address, including country)	<u>17-1-402, Anjindai,</u>	
		<u>Yokosuka-shi, Kanagawa 238-0048 Japan</u>	
13d	Typewritten Full Name of Sole or Fourth Inventor	<u>          </u>	<u>          </u>
		Given Name	Family Name
14d	Inventor's Signature		
15d	Date of Signature	<u>          </u>	<u>          </u>
		Month	Year
16d	Residence	<u>          </u>	<u>          </u>
		City	State or Province
			Country
17d	Citizenship	<u>          </u>	
18d	Post Office Address (Insert complete mailing address, including country)	<u>          </u>	
		<u>          </u>	

\*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.



**USA**  
**ASSIGNMENT OF PATENT APPLICATION**

- (1) Guizeng SHI
- (2) \_\_\_\_\_
- (3) \_\_\_\_\_
- (4) \_\_\_\_\_
- (5) \_\_\_\_\_

In consideration of the sum of one dollar (\$1.00) and other good and valuable consideration paid to each of the undersigned, the undersigned agree(s) to assign, and hereby does assign, transfer and set over to

- (6) MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
- (6a) of 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 JAPAN
- (7) \_\_\_\_\_
- (7a) of \_\_\_\_\_

(hereinafter designated as the Assignee) the entire rights, title and interest for the United States, its territories, dependencies and possessions, and for the country of

- (8) \_\_\_\_\_ in the invention, and all applications for patent and any Letters Patent which may be granted therefor, known as

- (9) \_\_\_\_\_  
\_\_\_\_\_ (Case No. \_\_\_\_\_)

for which the undersigned has (have) executed on even date herewith an application for patent in the United States of America or, if not on even date, then has executed

- (10) on \_\_\_\_\_ or has already filed
- (11) U.S. appln. Serial No. \_\_\_\_\_, filed on \_\_\_\_\_

- (12) The undersigned acknowledges an obligation of assignment of this invention to said assignee at the time the invention was made.

1) The undersigned agree(s) to execute all papers necessary in connection with the application and any continuing or divisional applications thereof and also to execute separate assignments in connection with such applications as the Assignee may deem necessary or expedient.

2) The undersigned agree(s) to execute all papers necessary in connection with any interference which may be declared concerning this application or continuation or division thereof and to cooperate with the Assignee in every way possible in obtaining such evidence and going forward with such interference.

3) The undersigned agree(s) to execute all papers and documents and perform any act which may be necessary in connection with claims or provisions of the International Convention for Protection of Industrial Property or similar agreements.

4) The undersigned agree(s) to perform all affirmative acts which may be necessary to obtain a grant of a valid United States patent to the Assignee.

5) The undersigned hereby authorize(s) and request(s) the Commissioner of Patents to issue any and all Letters Patent of the United States resulting from said application or any division or divisions or continuing applications thereof to the said Assignee, as Assignee of the entire interest, and hereby covenants that he has (they have) full right to convey the entire interest herein assigned, and that he has (they have) not executed and will not execute, any agreement in conflict herewith.

6) The undersigned hereby grant(s) the firm of STEVENS, DAVIS, MILLER & MOSHER, L.L.P. the power to insert on this assignment any further identification which may be necessary or desirable to comply with the rules of the United States Patent Office for recordation of this document.

In witness whereof, executed by the undersigned on the date(s) opposite the undersigned signature(s).

Date \_\_\_\_\_ Signature of Inventor (1) \_\_\_\_\_ (Seal)

Date \_\_\_\_\_ Signature of Inventor (2) \_\_\_\_\_ (Seal)

Date \_\_\_\_\_ Signature of Inventor (3) \_\_\_\_\_ (Seal)

Date \_\_\_\_\_ Signature of Inventor (4) \_\_\_\_\_ (Seal)

Date \_\_\_\_\_ Signature of Inventor (5) \_\_\_\_\_ (Seal)

This assignment should preferably be signed before: (a) a Notary Public if within the U.S.A., or (b) a U.S. Counsel if outside the U.S.A. If neither, then it should be signed before at least two witnesses who also sign here:

Date \_\_\_\_\_ Signature of Witness \_\_\_\_\_ (Seal)

Date \_\_\_\_\_ Signature of Witness \_\_\_\_\_ (Seal)



## DESCRIPTION

WIRELESS COMMUNICATION APPARATUS AND WIRELESS  
COMMUNICATION METHOD

## 5 Technical Field

The present invention relates to a wireless communication apparatus using ATM (Asynchronous Transfer Mode).

## 10 Background Art

As conventional wireless communication systems using ATM, there are major two samples as described below.

A first conventional system is an AWA (ATM Wireless  
15 Access) system with a purpose of providing multimedia services to mobile users. FIG.1 is a schematic diagram illustrating a structure of a frame for use in a conventional wireless communication system.

As illustrated in FIG.1, the structure of one frame  
20 has a first part in which access channel (Ach) 11 is followed by control channel (Cch) 12 and then user channel (Uch) 13, and a latter part in which access channel (Ach) 14 is followed by control channel (Cch) 15 and then user channel (Uch) 16.

25 Each of access channels 11 and 14 contains two time slots, namely, a downlink time slot ( $A_d$ ) and an uplink time slot ( $A_u$ ). Downlink Ach is a channel used in



instructing a mobile station on Cch allocation as well as a broadcast channel for various control information. Uplink Ach is a random access channel to acquire Cch.

Control channel (Cch) 12 is an uplink control  
5 channel and control channel (Cch) 15 is a downlink control channel. Cch is used in transmitting and receiving Uch control information such as establishment, disconnection and switching of Uch and messages concerning Cch switching control.

10 User channels (Uch) 13 and 16 contain downlink time slots for a base station to transmit for example ATM cells to a mobile station, and uplink time slots for the mobile station to transmit for example ATM cells to the base station.

15 In the conventional communication system using the aforementioned frame, a base station controls all the time slots of the control channels (Cch) and user channels (Uch). As a method for setting a communication band for a user request, the base station allots time  
20 slots for use by each mobile station from among time slots of user channels (Uch) 13 and 16 corresponding to the user request.

Further in an asymmetric traffic on up-and downlink channel, a base station designates the number of Uch time  
25 slots for the uplink and that for the downlink corresponding to a user information transmission rate independently using a wireless channel control section



at the time of channel allocation, instead of designating the same number of Uch time slots for the uplink and downlink, and thereby performs setting of communication band for user request.

5           A mobile station establishes synchronization of Ach with a base station providing a highest received level immediately after being turned on, and then transmits a message for requesting Cch establishment using uplink Ach by random access. The base station that  
10 receives the request searches unused Cch, transmits a Cch allocation message, and thereby notifies the mobile station of a Cch time slot number to use. Each base station is allocated one uplink Cch and one downlink Cch. Using these Cchs, each base station always transmits  
15 control information. Based on call control information, the base station notifies the mobile station of Uch time slots corresponding to a communication rate requested by a user using a Uch allocation instructing message. The base station manages a relationship between a Uch  
20 time slot number and Cch or mobile station number, and further manages used channels on Cch and Uch for each mobile station.

A second example of the conventional systems is an ATM-LAN system using radio signals with a wavelength of  
25 the order of millimeters. This system uses an uplink channel based on a random access scheme at a reservation stage and on a polling scheme at an information



transmission stage succeeding the reservation stage.

The polling in the above system includes periodical polling (such polling that periodically transmits a polling signal to each user) and non-periodical polling  
5 (such polling that irregularly transmits a polling signal to each user). These kinds of polling are used corresponding to QoS (Quality of Service) of user information.

A base station sets information such as a polling  
10 period, priority and polling time in a polling scheduler. Further based on the periodical polling, the base station calculates the polling time of each user to update the contents of the polling scheduler. After that, based on the updated polling scheduler, the base station  
15 transmits the polling signal to each user. According to the polling signal transmitted from the base station as described above, each user transmits a transmission queuing data frame.

In addition, the base station performs the non-  
20 periodical polling between the periodical polling.

However, there are following problems in the convention systems.

The first system has a frame structure disorderly containing an uplink time slot and downlink time slot  
25 on Uch, although a guard time with a long time interval is needed between the uplink time slot and downlink time slot for immunity to interference. Accordingly in the



first conventional system, it is necessary to provide a large number of guard time intervals as a whole, and therefore there are problems that the frame utilization rate deteriorates and that the system capacity decreases.

Further in the first conventional system, the channel allocation is not performed based on traffic amounts of the uplink and downlink. Therefore, in an asymmetric traffic on which traffic amounts (transmission rates) are different between the uplink and downlink channels, the frame utilization rate is low on a channel with a low transmission rate as compared to the other channel with a high transmission rate. Accordingly, there is another problem that the first conventional system is not capable of improving the system capacity.

Furthermore in the first conventional system, packets do not collide with each other, however, Uch is occupied for each connection. Therefore the efficiency based on the packet exchange deteriorates and comes close to that based on channel exchange. In currently used packet access control schemes (such as random access scheme and reservation scheme), the efficiency is improved to some extent, however, the problem on the collision is not improved, therefore the throughput deteriorates, and delay and delay variation are increased.



In the second conventional system, communications corresponding to QoS of user are achieved, however, an asymmetric traffic is not considered, and therefore there are problems that the frame utilization rate and system capacity cannot be improved.

#### Disclosure of Invention

It is an object of the present invention to provide a wireless communication apparatus that faithfully responds to an asymmetric traffic and QoS of user and enables improved frame utilization rate and improved system capacity. This object is achieved by allocating time slots for use by each communication user based on respective situations of transmission queuing cell on uplink channel and downlink channel of the communication user.

#### Brief Description of Drawings

FIG.1 is a schematic diagram illustrating a structure of a frame used in a conventional wireless communication system;

FIG.2 is a schematic diagram illustrating a structure of a communication system using a wireless communication apparatus according to a first embodiment of the present invention;

FIG.3 is a schematic diagram illustrating a frame format used in the wireless communication apparatus



according to the first embodiment;

FIG.4 is a schematic diagram illustrating a structure of a time slot on a user channel of the frame format used in the wireless communication apparatus  
5 according to the first embodiment;

FIG.5 is a block diagram illustrating a configuration of a base station provided with the wireless communication apparatus according to the first embodiment;

10 FIG.6 is a block diagram illustrating a configuration of a wireless channel control section in the wireless communication apparatus according to the first embodiment;

FIG.7 is a block diagram illustrating a  
15 configuration of a user channel managing section in the wireless communication apparatus according to the first embodiment;

FIG.8A is a schematic diagram illustrating a channel allocation method for use by a channel allocating  
20 section in the wireless communication apparatus according to the first embodiment;

FIG.8B is a schematic diagram illustrating a channel allocation result by the channel allocating section in the wireless communication apparatus  
25 according to the first embodiment;

FIG.9A is a schematic diagram illustrating a channel allocation method for use by a channel allocating



section in the wireless communication apparatus according to a second embodiment of the present invention;

FIG.9B is a schematic diagram illustrating a  
5 channel allocation result by the channel allocating section in the wireless communication apparatus according to the second embodiment;

FIG.10A is a schematic diagram illustrating a  
channel allocation method for use by a channel allocating  
10 section in the wireless communication apparatus according to a third embodiment of the present invention;

FIG.10B is a schematic diagram illustrating a  
channel allocation result by the channel allocating  
section in the wireless communication apparatus  
15 according to the third embodiment;

FIG.11 is a schematic diagram illustrating an example of a frame structure according to a fourth embodiment of the present invention; and

FIG.12 is a schematic diagram illustrating an  
20 example of a frame structure according to a fifth embodiment of the present invention.

#### Best Mode for Carrying Out the Invention

Preferred embodiments for carrying out the present  
25 invention are explained specifically below with reference to accompanying drawings. In addition, a wireless communication apparatus according to the



present invention performs communications using ATM.  
(First embodiment)

FIG.2 is a schematic diagram illustrating a structure of a communication system using the wireless communication apparatus according to the first embodiment of the present invention. Base station (BTS) 101 communicates with mobile station (MS) 102, for example, using a TDMA (Time Division Multiple Access)/TDD (Time Division Duplex) system.

FIG.3 is a schematic diagram illustrating a frame format used in the wireless communication apparatus according to the first embodiment. As illustrated in FIG.3, a unit frame (1 frame) is comprised of access channel (Ach) 201, uplink control channel (Cch) 202, downlink control channel (Cch) 203, downlink user channel (Uch) 204, and uplink user channel (Uch) 206.

Access channel 201 is comprised of downlink time slot ( $A_d$ ) and uplink time slot ( $A_u$ ). The downlink time slot is used for base station 101 to broadcast various control information to each mobile station 102 as well as instructing a control channel allocated to each mobile station 102. Meanwhile, the uplink time slot is used for each mobile station 102 to acquire the control channel.

Uplink control channel 202 and downlink control channel 203 are used for base station 101 and each mobile station 102 to communicate control information on



establishment, disconnection and switching of each user channel and information on switching control of each control channel.

In particular, uplink control channel 202 is a  
5 channel used for each mobile station 102 to transmit to  
base station 101 a reporting signal for reporting  
contents of a transmission buffer of each mobile station  
102 for each frame. The reporting signal is indicative  
of presence or absence of transmission data (such as an  
10 ATM cell) in the transmission buffer of each mobile  
station 102, queuing situation of cells to be transmitted  
(the number of queuing cells or level representative of  
the number of queuing cells), and particular QoS  
requirement. Base station 101 thereby recognizes a  
15 situation on transmission of each mobile station 102.

Meanwhile, downlink control channel 203 is a  
channel used for base station 101 to notify a position  
of a user channel allocated to each mobile station 102  
according to a user channel allocation result described  
20 later.

Downlink user channel 204 is a channel used for base  
station 101 to transmit, for example, ATM cells to each  
mobile station 102. Uplink user channel 206 is a channel  
for each mobile station 102 to transmit, for example,  
25 the ATM cells to base station 101. The respective  
numbers of time slots contained on downlink user channel  
204 and on uplink user channel 206 are not fixed, and



boundary position 205 between the channels is determined based on the user channel allocation result described later.

FIG.4 illustrates an example of a structure of each time slot on the aforementioned user channel. FIG.4 is a schematic diagram illustrating the structure of the time slot on the user channel with the frame format used in the wireless communication apparatus according to this embodiment. Each time slot is comprised of protection guard time (GT) 301, bit timing recovery code (BTR) 302, unique word (UW) 303, and eight cells 304. In addition, the aforementioned structure of the time slot on the user channel is one of examples and is capable of being modified as appropriate corresponding to, for example, a communication situation and use.

An internal configuration of base station 101 illustrated in FIG.2 is next explained using FIG.5. FIG.5 is a block diagram illustrating a configuration of a base station provided with the wireless communication apparatus according to this embodiment.

First, at the time of reception, antenna section 401 receives a signal transmitted from each mobile station 102 to output to RF section 402. RF section 402 performs frequency conversion on the signal transmitted from antenna section 401, and outputs the signal with the converted frequency to modulation/demodulation section 403. Modulation/demodulation section 403



performs demodulation such as  $\pi/4$ QPSK scheme on the signal output from RF section 402, and outputs the demodulated signal to TDMA section 404.

TDMA section 404 performs general TDMA processing  
5 on the signal output from modulation/demodulation section 403. That is, TDMA section 404 first fetches data corresponding to a time slot at a predetermined timing from the signal output from modulation/demodulation section 403, and extracts a  
10 unique word from the fetched data to establish synchronization.

After establishing the synchronization, TDMA section 404 fetches various information from the data corresponding to a time slot, and corresponding to the  
15 contents of the fetched information, outputs the information to IF section 405 or wireless channel control section 406. Specifically, when the thus fetched information is various control information described previously transmitted on access channel 201 and control  
20 channel 202, TDMA section 404 outputs the fetched information to wireless channel control section 406. Meanwhile, when the thus fetched information is, for example, speech information transmitted on user channel 206, TDMA section 404 outputs the fetched information  
25 to IF section 405.

IF section 405 outputs the information output from TDMA section 404 to PSTN (Public Switched Telephone



Network) and ISDN (Integrated Services Digital Network).

Next, at the time of transmission, IF section 405 outputs a signal transmitted from PSTN and ISDN to TDMA section 404.

5        According to the frame format contents (FIG.3) described previously, TDMA section 404 performs general TDMA processing on the signal containing various control information output from wireless channel control section 406 or the signal output from IF section 405. That is,  
10       according to the frame format contents, TDMA section 404 adds a control signal such as a unique word to the signal containing various control information output from wireless channel control section 406 or the signal output from IF section 405 to generate data corresponding to  
15       a time slot, and inserts the generated data corresponding to a time slot into a predetermined slot at a predetermined timing to output to modulation/demodulation section 403.

Modulation/demodulation section 403 performs  
20       modulation such as  $\pi/4$ QPSK scheme on the signal output from TDMA section 404, and outputs the modulated signal to RF section 402. RF section 402 performs frequency conversion on the signal output from modulation/demodulation section 403, and transmits the  
25       signal with the converted frequency to each mobile station 102 through antenna section 401.

Call control section 407 performs user management



such as call connection control and authentication of a user (mobile station).

Wireless channel control section 406 controls above-mentioned antenna section 401, RF section 402, modulation/demodulation section 403, TDMA section 404, IF section 405, and call control section 407. An internal configuration of wireless channel control section 406 is explained using FIG.6.

FIG.6 is a block diagram illustrating the internal configuration of wireless channel control section 406 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment. Wireless channel control section 406 is mainly provided with communication quality monitoring section 501, mobile station managing section 502, and wireless resource managing section 503.

Communication quality monitoring section 501 always monitors a communication quality of each channel, and performs processing such as switching or disconnection of a channel on which the communication quality deteriorates. Mobile station managing section 502 manages a telephone number of each mobile station 102, while managing a channel for use by mobile station.

Wireless resource managing section 503 manages, for example, allocation of wireless resource. That is, wireless resource managing section 503 performs channel allocation to each mobile station 102 using various



control information output from TDMA section 404, while outputting a channel allocation result to TDMA section 404. More specifically, wireless resource managing section 503 is comprised of access channel (Ach) managing section 504, control channel (Cch) managing section 505, and user channel (Uch) managing section 506.

Access channel managing section 504 manages access channel 201. In particular, when access channel managing section 504 receives through TDMA section 404 a signal for requesting acquisition of a control channel transmitted from each mobile station 102, the section 504 requests control channel managing section 505 to allocate a control channel to each mobile station 102. Then, access channel managing section 504 receives the control channel allocation result for each mobile station 102 from control channel managing section 505, and transmits the result to each mobile station 102 through TDMA section 404.

Control channel managing section 505 manages uplink control channel 202 and downlink control channel 203. That is, when control channel managing section 505 receives a request for allocating a control channel to each mobile station 102 from access channel managing section 504, the section 503 determines a time slot to allocate to each mobile station 102 from among time slots on each control channel. After that, control channel managing section 505 outputs the allocation result



described above to access channel managing section 504.

Further when control channel managing section 505 receives the reporting signal for reporting the contents of the transmission buffer transmitted for each frame from each mobile station 102 through TDMA section 404, the section 505 outputs a signal for requesting time slot allocation on each user channel to user channel managing section 506 along with the reporting signal. Then, when control channel managing section 505 receives the allocation result from user channel managing section 506, the section 505 transmits the allocation result to each mobile station 102 through TDMA section 404.

User channel managing section 506 manages uplink user channel 206 and downlink user channel 204. Specifically, user channel managing section 506 allocates time slots for use by each mobile station 102 on uplink user channel 206 and on downlink user channel 204. More specifically, user channel managing section 506 allocates time slots for use by each mobile station 102 based on a situation (hereinafter referred to as uplink transmission situation) of the number of transmission queuing cells that each mobile station 102 has, another situation (hereinafter referred to as downlink transmission situation) of the number of transmission queuing cells that base station 101 has, and the other situation indicating how many transmission queuing cells that require particular QoS are contained



in respective transmission queuing cells that each mobile station 102 and base station 101 have.

Among those situations, since user channel managing section 506 manages each user channel, the  
5 section 506 can always recognize the downlink transmission situation and the situation (hereinafter referred to as QoS requirement situation of the base station) of the transmission queuing cells that require the particular QoS contained in the transmission queuing  
10 cells that base station 101 has.

Meanwhile, since using the reporting signal described previously on uplink control channel 202, each mobile station transmits to base station 101 the uplink transmission situation and the situation (hereinafter  
15 referred to as QoS requirement situation of the mobile station) of the transmission queuing cells that require the particular QoS contained in the transmission queuing cells that mobile station 102 has, user channel managing section 506 can recognize the above situations.

20 A specific configuration of user channel managing section 506 is explained below using FIG.7. FIG.7 is a block diagram illustrating a configuration of user channel managing section 506 provided inside base station 101 equipped with the wireless communication  
25 apparatus according to this embodiment.

User channel managing section 506 is mainly comprised of downlink transmission situation buffer 601,



channel allocating section 602 and downlink transmission situation buffer 603.

Downlink transmission situation buffer 601 stores information on the downlink transmission situation and  
5 on the QoS requirement situation of the base station, while outputting the aforementioned information to channel allocating section 602.

Uplink transmission situation buffer 603 stores information on the uplink transmission situation and on  
10 the QoS requirement situation of the mobile station, while outputting the aforementioned information to channel allocating section 602. The uplink transmission situation and the QoS requirement situation of the mobile station are of information transmitted from  
15 each mobile station 102 to base station 101 using uplink control channel 202 as described above, and output to uplink transmission buffer 603 through control channel managing section 505.

Channel allocating section 602 receives the  
20 information on the downlink transmission situation and on the QoS requirement situation of the base station from downlink transmission situation buffer 601 and further receives the information on the uplink transmission situation and on the QoS requirement situation of the  
25 mobile station from uplink transmission situation buffer 603. Based on the received information, channel allocating section 602 performs channel allocation on



downlink user channel 204 and uplink user channel 206. A specific channel allocation method for use by channel allocating section 602 is explained below using FIG.8A.

FIG.8A is a schematic diagram illustrating a  
5 channel allocation method for use by channel allocating section 602 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment.

As a channel allocation method, channel allocating  
10 section 602 adopts a scheme for achieving that channels are allocated fairly corresponding to both transmission situations, namely, the uplink transmission situation and downlink transmission situation without distinguishing between the uplink and downlink and that  
15 channels are allocated in consideration of the QoS requirements of the mobile station and of the base station. The scheme is explained using FIG.8A.

In FIG.8A, an upper portion indicates the downlink transmission situation and the QoS requirement situation  
20 of the mobile station stored in downlink transmission situation buffer 601, and a lower portion indicates the uplink transmission situation and the QoS requirement situation of the base station stored in uplink transmission situation buffer 603. That is, the upper  
25 portion indicates the buffer contents indicative of situations of transmission queuing cells to transmit to users (mobile stations) 1 to m that base station 101 has,



respectively using  $\lambda_{D,1}$  to  $\lambda_{D,m}$ . The lower portion indicates the buffer contents indicative of situations of transmission queuing cells to transmit to base station 101 that users 1 to m have, respectively using  $\lambda_{U,1}$  to  $\lambda_{U,m}$ . For example, it is indicated that buffer  $\lambda_{D,1}$  contains three transmission queuing cells to transmit to user 1 from base station 101 and that buffer  $\lambda_{U,m}$  contains no transmission queuing cell to transmit to base station 101 from user m.

Further, a middle portion indicates dual shift ring 701 that conceptually indicates the channel allocation method. Dual shift ring 701 is mainly comprised of a ring (hereinafter referred to as normal ring) for fairly allocating channels to each user and another ring (hereinafter referred to as high-rate ring) for preferentially allocating channels to a particular user requiring a real-time and high-rate communication such as an image communication. The two rings are alternatively circulated. In addition, in FIG.8A, the normal ring is a ring lying on an outer side, and the high-rate ring is a ring lying on an inner side from the normal ring.

Channel allocating section 602 performs channel allocation according to a certain rule as described below. Channel allocating section 602 first determines (loop check) whether or not each user is a user for the allocation in the order along dual shift ring 701. The



user for the allocation at the time of the normal ring is every user having a transmission queuing cell, and such a user at the time of the high-rate ring is only a particular user having a transmission queuing cell.

5       Further, channel allocating section 602 allocates a unit sub-slot, i.e., a single sub-slot (corresponding to a cell) to a user for the allocation, and decreases the number of transmission queuing cells in the buffer for this user by 1. Thereafter, channel allocating  
10 section 602 allocates a sub-slot to each user up to the maximum number of accommodated channels, i.e., the maximum number of sub-slots that a frame is capable of accommodating, while checking along dual shift ring 701.

      The aforementioned channel allocation is performed  
15 for each frame. In each frame, the loop check is initiated starting from a position where the check of a last frame is finished in dual shift ring 701. In addition, when transmission queuing cells are consumed, the allocation in the frame is finished.

20       Finally channel allocating section 602 divides all sub-slots allocated to respective users into two groups, namely, an uplink sub-slot group and a downlink sub-slot group. Then channel allocating section 602 gathers the sub-slots allocated to each user into one as a unit  
25 time slot, i.e., a single time slot (variable length slot) for each user.

      In addition, a service priority of a particular



user is changed by changing an alternate frequency between the normal ring and high-rate ring.

A specific example of the channel allocation method described above is next explained further using FIG.8B.

5 FIG.8B is a schematic diagram illustrating a channel allocation result by channel allocating section 602 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment.

It is herein assumed that an  $i_{th}$  user on uplink and  
10 a  $j_{th}$  user on downlink are particular users, and that the loop check is initiated from a first user on downlink in normal ring circulation.

Channel allocating section 602 first determines whether or not a first user on downlink is a user for  
15 the allocation. The first user on downlink has transmission queuing cells, and therefore channel allocating section 602 determines the first user on downlink to be the user for the allocation. Accordingly channel allocating section 602 allocates a sub-slot  
20 ( $UC_{d,1}$ ) to the first user on downlink, while decreasing the number of transmission queuing cells in the buffer for this user by 1.

Similarly, channel allocating section 602 allocates a sub-slot ( $UC_{d,j}$ ) and sub-slot ( $UC_{d,m}$ ) to the  
25  $j_{th}$  user on downlink and an  $m^{th}$  user on downlink, while decreasing the respective numbers of transmission queuing cells in the buffers for these users by 1,



respectively.

Further, channel allocating section 602 checks along dual shift ring 701, and determines an  $m^{\text{th}}$  user on uplink. The  $m^{\text{th}}$  user on uplink does not have any transmission queuing cell, and therefore channel allocating section 602 does not adopt the  $m^{\text{th}}$  user for the allocation and determines a next user.

Then, channel allocating section 602 determines an  $i_{\text{th}}$  user on uplink and a first user on uplink to be users for the allocation, and allocates a sub-slot ( $UC_{v,i}$ ) and sub-slot ( $UC_{v,1}$ ) to these users, while decreasing the respective numbers of transmission queuing cells in the buffers for these users by 1, respectively.

The loop check is next performed while circulating the high-rate ring (first circulation). That is, channel allocating section 602 determines only the  $j_{\text{th}}$  user on downlink and  $i_{\text{th}}$  user on uplink to be users for the allocation, and allocates a sub-slot ( $UC_{d,j}$ ) and sub-slot ( $UC_{v,i}$ ) to these users, while decreasing the respective numbers of transmission queuing cells in the buffers for these users by 1, respectively.

At this point, since the transmission queuing cells are still present, the loop check is performed along the normal ring (second circulation). Similarly, channel allocating section 602 allocates a sub-slot ( $UC_{d,1}$ ) and sub-slot ( $UC_{d,j}$ ) to the first user on downlink and  $j_{\text{th}}$  user on downlink respectively. Then, since a user on uplink



does not have any transmission queuing cell, the loop check is performed along the high-rate ring (second circulation).

At this point, since the particular users, i.e.,  
5 the  $j_{th}$  user on downlink and  $i_{th}$  user on uplink do have any transmission queuing cells, the loop check is performed along the normal ring (third circulation).

In the normal ring (third circulation), channel allocating section 602 allocates a sub-slot ( $UC_{d,1}$ ) to  
10 the first user on downlink.

At this point, since any transmission queuing cell is not present in the buffer for each user, channel allocating section 602 finishes the allocation in this frame. In addition, the allocation in this frame is  
15 finished at a point of the first user on downlink, and therefore an allocation in a next frame is initiated from this user.

As a result, in the order illustrated at the upper portion in FIG.8A, channel allocating section 602  
20 allocates sub-slots. Finally, as illustrated at a lower portion in FIG.8B, channel allocating section 602 divides all the sub-slots allocated to respective users into the uplink sub-slot group and downlink sub-slot group, and in each sub-slot group, gathers the sub-slots  
25 allocated to each user into a time slot (variable length slot) for each user. Further, channel allocating section 602 inserts thus gathered downlink time slots



and uplink time slots respectively into downlink user channel 204 and uplink user channel 206 illustrated in FIG.3. Thereby on the user channel, the uplink time slots and downlink time slots are divided with boundary 205 therebetween, and therefore a guard time to be needed is suppressed. As a result, the frame is effectively used.

As described above, channel allocating section 602 allocates the channel fairly without distinguishing between the uplink and downlink corresponding to respective transmission situations of uplink and of downlink. Further, channel allocating section 602 allocates the channel by considering respective QoS requirements of a mobile station and of a base station. The foregoing is the specific channel allocation method in channel allocating section 602.

The operation of base station 101 provided with the wireless communication apparatus with the above configuration is next explained using FIG.5.

First, at the time of reception, a signal transmitted from each mobile station 102 is received at antenna section 401 of base station 101 and is output to RF section 402. RF section 402 performs frequency conversion on the signal received at antenna section 401 to output to modulation/demodulation section 403. Modulation/demodulation section 403 performs demodulation such as  $\pi/4$ QPSK scheme on the signal



subjected to the frequency conversion in RF section 402 to output to TDMA section 404.

TDMA section 404 fetches data from the signal demodulated in modulation/demodulation section 403 for  
5 each time slot at a predetermined timing, and extracts various information from the fetched data. The thus extracted information is output to either wireless channel control section 406 or IF section 405 corresponding to contents of the information. That is,  
10 the extracted information is output to IF section 405 when its contents is indicative of, for example, speech information transmitted on uplink user channel 206, while being output to wireless channel control section 406 when its contents is indicative of various control  
15 signals transmitted on access channel 201 and uplink control channel 202 described previously.

IF section 405 transmits the information such as speech output from TDMA section 404 to PSTN (Public Switched Telephone Network) and ISDN (Integrated  
20 Services Digital Network).

Wireless channel control section 406 performs an operation corresponding to the contents of the control information output from TDMA section 404. In addition, the operation is described later.

25 Meanwhile, at the time of reception, signals transmitted from PSTN and ISDN are output to TDMA section 404 through IF section 405. Further, various control



signals output from wireless channel control section 406 are provided to TDMA section 404 according to the frame format described previously.

TDMA section 404 performs general TDMA processing on the signal output from IF section 405 or wireless channel control section 406 according to the frame contents described previously. In other words, the section 404 adds a control signal such as a unique word to various control signals output from IF section 405 or the signal such as a speech signal output from wireless channel control section 406 according to the frame contents described previously to generate data corresponding to a time slot, and then inserts the data into a predetermined slot to output to modulation/demodulation section 403.

Modulation/demodulation section 403 performs modulation such as  $\pi/4$ QPSK scheme on the signal output from TDMA section 404 to output to RF section 402. RF section 402 performs frequency conversion on the signal modulated in modulation/demodulation section 403, and the resultant signal is transmitted to each mobile station 102 through antenna section 401.

Further, the operation in wireless channel control section 406 is explained according to the frame contents illustrated in FIG.3.

The operation on access channel 201 is first explained.



Using uplink time slot ( $A_u$ ), each mobile station 102 transmits a control signal to acquire a control channel to access channel managing section 504. Receiving the signal, access channel managing section 504 outputs a signal for requesting to allocate a control channel to each mobile station 102 to control channel managing section 505. Control channel managing section 505 allocates a control channel to each mobile station 102, and outputs the allocation result to access channel managing section 504.

Using downlink time slot ( $A_d$ ), access channel managing section 504 transmits to each mobile station 102 the allocation result (in a previous frame) for each mobile station 102 and various control information.

The operations on uplink control channel 202 and downlink control channel 203 are next explained.

Using uplink control channel 202, each mobile station 102 transmits a reporting signal for reporting the contents of a transmission buffer to control channel managing section 505. Receiving the signal, control channel managing section 505 outputs to user channel managing section 506 a signal for requesting to allocate a time slot on each user channel along with the reporting signal.

Specifically, the reporting signal, that is, the uplink transmission situation and QoS requirement situation of the mobile station are stored in uplink



transmission situation buffer 603 illustrated in FIG.7. Further, the signal for requesting to allocate a time slot is output to channel allocating section 602 illustrated in FIG.7. At the same time, the downlink transmission situation and QoS requirement situation of the base station are stored in downlink transmission situation buffer 601.

Based on the uplink transmission situation, QoS requirement situation of the mobile station, downlink transmission situation and QoS requirement situation of the base station, channel allocating section 602 allocates time slots for use by the mobile station on uplink user channel 206 and downlink user channel 204. The specific allocation method is as described previously.

When the channel allocation is finished, channel allocating section 602 outputs the allocation result to control channel managing section 505.

Using downlink control channel 203, control channel managing section 505, i.e., channel allocating section 602 transmits the channel allocation result on each user channel to each mobile station 102.

The operations on downlink user channel 204 and uplink user channel 206 are finally explained.

Using downlink user channel 204, based on the frame contents, i.e., the allocation result described above, information such as speech output from IF section 405



is transmitted to each mobile station 102.

Using uplink user channel 206, based on the allocation result on each user channel notified using downlink control channel 203, each mobile station 102  
5 transmits information such as speech to base station 101.

The foregoing is the operations of the base station provided with the wireless communication apparatus according to this embodiment.

Thus, according to this embodiment, the number of  
10 uplink time slots and the number of downlink time slots on a user channel are determined based on the number of transmission queuing cells (uplink traffic amount) that each mobile station has, the number of transmission queuing cells (downlink traffic amount) that the base  
15 station has and QoS that each mobile station and the base station have, and therefore the channel allocation is performed that faithfully and fast responds to uplink and downlink traffic amounts. Accordingly, it is possible to achieve a communication that responds to an  
20 asymmetric traffic and QoS of a user without affecting the frame utilization rate and system capacity.

(Second embodiment)

Second embodiment is modified from the first  
25 embodiment to assure the QoS of a user to its maximum.

A wireless communication apparatus according to the second embodiment has the same configuration as that



in the first embodiment except a channel allocating section, and detailed explanations are omitted. The channel allocating section in the wireless communication apparatus according to this embodiment is explained  
5 below in points different from the channel allocating section in the first embodiment using FIG.9A. In addition, the same sections as those in the first embodiment are not explained.

FIG.9A is a schematic diagram illustrating a  
10 channel allocation method for use by the channel allocating section in a base station provided with the wireless communication apparatus according to the second embodiment of the present invention.

First with respect to each of particular users, the  
15 channel allocating section sets a threshold  $Q_{th}$  801 for the number of transmission queuing cells, and further sets a flag indicative of a compared result between the number of transmission queuing cells and the threshold  $Q_{th}$  801. Specifically, the channel allocating section  
20 sets a flag of "1" for a particular user that has transmission queuing cells of which the number is more than the threshold  $Q_{th}$  801, and a flag of "0" for a particular user that has transmission queuing cells of which the number is less than the threshold  $Q_{th}$  801, among  
25 the particular users.

Further when the particular user is present of which the flag indicates "1", the channel allocating



section performs the loop check along the high-rate ring described previously until flag values of the particular users become all "0". The loop check when the flag values of the particular users have become all "0" is  
 5 the same as that in the first embodiment.

A specific example of the allocation method for use by the above-mentioned allocating section is next explained further using FIG.9B. FIG.9B is a schematic diagram illustrating a channel allocation result by the  
 10 channel allocating section in a base station provided with the wireless communication apparatus according to this embodiment.

It is herein assumed as in the first embodiment that an  $i_{th}$  user on uplink and  $j_{th}$  user on downlink are  
 15 particular users. Further assume that the threshold  $Q_{th}$  801 is "2". In addition, a value of the threshold  $Q_{th}$  may be changed as appropriate corresponding to, for example, a communication condition and usage.

First, the channel allocating section examines the  
 20 numbers of transmission queuing cells of particular users, and sets a flag of the  $i_{th}$  user on uplink to "0" and a flag of the  $j_{th}$  user on downlink to "1". At this point, since the user is present of which the flag indicates "1", the channel allocating section performs  
 25 the loop check along the high-rate ring.

That is, the channel allocating section allocates a sub-slot ( $UC_{D,j}$ ) to the  $j_{th}$  user on downlink, while



decreasing the number of transmission queuing cells in the buffer for this user by 1. The number of transmission queuing cells of the  $j_{th}$  user on downlink becomes thereby less than the threshold  $Q_{th}$  801, and the  
5 channel allocating section sets the flag of the user to "0".

Flag values of the particular users thus become all "0", and therefore the channel allocating section finishes the preferential allocation to the particular  
10 users described above. Thereafter, the channel allocating section performs the general allocation in the same way as in the first embodiment.

As a result, in the order illustrated in FIG.9B, each user is allocated sub-slots. As illustrated in  
15 FIG.9B, it is obvious that sub-slots are preferentially allocated to the  $j_{th}$  (particular) user on downlink who has transmission queuing cells of which the number is more than the threshold  $Q_{th}$  801.

Thus according to this embodiment, the channel is  
20 preferentially allocated to a particular user by considering the number of transmission queuing cells that the user has, and therefore it is possible to assure a reliable communication to the particular user that needs to perform a real-time and fast communication such  
25 as an image. At the same time, it is possible to achieve a communication that responds to an asymmetric traffic and QoS of the user without affecting the frame



utilization rate and system capacity.

(Third embodiment)

The third embodiment is to assure the QoS of a user  
5 to its maximum as the second embodiment.

A wireless communication apparatus according to  
the third embodiment has the same configuration as that  
in the second embodiment except a channel allocating  
section, and detailed explanations are omitted. The  
10 channel allocating section in the wireless communication  
apparatus according to this embodiment is explained  
below in points different from the channel allocating  
section in the second embodiment using FIG.10A. In  
addition, the same sections as those in the second  
15 embodiment are not explained.

With respect to each of particular users, the  
channel allocating section sets a threshold  $W_{th}$  901 for  
a transmission queuing time of transmission queuing cell  
and further sets a flag indicative of a compared result  
20 between the transmission queuing time of transmission  
queuing cell and the threshold  $W_{th}$  901. Specifically,  
the channel allocating section sets a flag of "1" for  
a particular user that has a transmission queuing time  
of transmission queuing cell that is longer than the  
25 threshold  $W_{th}$  901, and a flag of "0" for a particular user  
that has a transmission queuing time of transmission  
queuing cell that is shorter than the threshold  $W_{th}$  901,



among the particular users.

In addition, the transmission queuing time of transmission queuing cell corresponds to a summation, with respect to all transmission queuing cells, of a time from the time information on a transmission queuing cell that a particular user has is stored in uplink transmission situation buffer 603 or downlink transmission situation buffer 601 illustrated in FIG. 7 at the time the channel allocation is initiated to the time the channel allocating section starts the channel allocation. In order to obtain the transmission queuing time of transmission queuing cell described above, the channel allocating section stores transmission queuing times with respect to all transmission queuing cells that a particular user(s) has.

In addition, while this embodiment explains the case that the transmission queuing time of transmission queuing cell is set as described above, the present invention is not limited to the case, and is capable of being carried out in any case modified as appropriate such as a case that the transmission queuing time of transmission queuing cell is a time from the time a particular user transmits information on a transmission queuing cell to the time a base station receives the information.

The foregoing is a different point of the channel allocating section in this embodiment from the channel



allocating section in the second embodiment.

A specific allocation method by the above-mentioned channel allocating section is next explained further using FIG.10B. FIG.10B is a schematic diagram illustrating a channel allocation result by the channel allocating section in a base station provided with the wireless communication apparatus according to this embodiment. In addition, to simplify the explanation, assume that a transmission queuing time corresponding to a transmission queuing cell that each user has is all the same.

It is herein assumed as in the second embodiment that an  $i_{th}$  user on uplink and  $j_{th}$  user on downlink are particular users. Further assume that the threshold  $W_{th}$  is a transmission queuing time corresponding to two transmission queuing cells.

First, the channel allocating section examines the transmission queuing times of transmission queuing cell of particular users, and sets a flag of the  $i_{th}$  user on uplink to "0" and a flag of the  $j_{th}$  user on downlink to "1". At this point, since the user is present of which the flag indicates "1", the channel allocating section performs the loop check along the high-rate ring.

In other words, the channel allocating section allocates a sub-slot ( $UC_{D,j}$ ) to the  $j_{th}$  user on downlink, while decreasing the number of transmission queuing cells in the buffer for this user by 1. The transmission



queuing time of transmission queuing cell of the  $j_{th}$  user on downlink becomes thereby less than the threshold  $W_{th}$  901, and the channel allocating section sets the flag of the user to "0". The operation performed thereafter is the same as in the second embodiment and the explanation thereof is omitted.

As a result, in the order illustrated in FIG.10B, each user is allocated sub-slots. As illustrated in FIG.10B, it is obvious that sub-slots are preferentially allocated to the  $j_{th}$  (particular) user on downlink who has the transmission queuing time of transmission queuing cell that is longer than the threshold  $W_{th}$  901.

Thus according to this embodiment, the channel is preferentially allocated to a particular user by considering the transmission queuing time of transmission queuing cell that the user has, and therefore it is possible to assure a reliable communication to the particular user that needs to perform a real-time and fast communication such as an image. At the same time it is possible to achieve a communication that responds to an asymmetric traffic and QoS of the user without affecting the frame utilization rate and system capacity.

(Fourth embodiment)

This embodiment allocates, using a CDMA technique, a temporary dedicated access channel to a transmission



reporting signal that reflects a transmission queuing situation of a transmission buffer of each wireless terminal for each frame.

An example of a frame structure of this embodiment is explained using FIG.11. In FIG.11, "1001" denotes a frame, "1002" denotes a multi control channel using the CDMA technique, "1003" denotes a user and user allocation channel using a technique such as TDMA, CDMA or OFDM, "1004" denotes an uplink/downlink dedicated control channel, "1005" denotes an uplink/downlink random access channel (only the time a mobile station is turned on), "1006" denotes an uplink/downlink access and control channel, "1007" denotes a downlink user channel, "1008" denotes an uplink user channel, and "1009" denotes a variable uplink/downlink user channel boundary.

The frame structure of this embodiment contains, as in the conventional TDD system, access channel (Ach) 1005, control channel (Cch) 1004, and user channels 1007 and 1008. Ach and Cch are used to transmit and receive signals using the CDMA system. This embodiment thereby aims to efficiently use channels.

A frame is divided into two parts, i.e., terminal transmission queuing situation reporting signal part 1002 and user information part 1003. The former part is for a transmission queuing situation reporting signal indicative of a transmission queuing situation of a



transmission buffer of each wireless terminal, and the reporting signal is allocated a temporary dedicated multi control channel using a CDMA system to report the transmission queuing situation to a base station without  
5 a collision.

The dedicated control channel does not provide interference with other channels when no signal is thereon due to a characteristic of the CDMA with a software-like system capacity. It is thereby possible  
10 to use channels effectively.

The allocation of multi control channel 1004 is performed as described next. In the case of a mobile communication, a base station provides a power-on access channel and channel code broadcast channel 1005, and  
15 acquires an access channel code of each mobile station in calling, answering and handover.

The base station is provided with a relation table with addresses (or user IDs) of respective mobile stations and multi control channel codes as shown in the  
20 following Table 1, and manages the allocation, search and usage situation of the multi control channel. The mobile station uses power-on access channel 1005 only at the time the mobile station is turned on in calling, and transmits a user address or channel ID to the base  
25 station using a random access protocol, and the base station obtains a dedicated multi control channel code. In addition, in Table 1, "A" denotes an identification



address of a terminal accessing, "x" denotes non-access, "C" denotes a multi control channel code being used and "Cx" denotes an unused channel code.

[Table 1]

Wireless Terminal Identification Address	Multi Control Channel Code	Usage Situation
A1	C1	1
A2	C2	1
A3	C3	1
. . .	. . .	1
X	Cx1	0
X	Cx2	0
X	Cx3	0
. . .	. . .	0

5

That is, the above table is provided in order for a base station to manage the allocation, usage situation and the like of the control channel. Before performing a communication, each wireless terminal applies a control channel number and acquires a control channel for the terminal, and the base station notifies the terminal of the control channel code being not used currently (usage situation is 0) with the identification address of the terminal. Further, the base station releases the corresponding control channel code when the calling is finished.

The base station notifies the terminal of a code of a vacant channel using the channel code broadcast channel. In answering, the base station notifies the mobile station of a code of a vacant multi control channel

20



directly using channel code broadcast channel 1002. In a handover, a handover-destination base station searches for a vacant multi control channel, and transmits a code of an allocated multi control channel to the base station currently communicating with the mobile station, and the base station notifies the mobile station of the code using the channel code broadcast channel.

Thus according to this embodiment, a wireless terminal transmits a transmission queuing reporting signal to a base station without a collision by using a temporary dedicated control channel, and the base station is thereby capable of instantaneously recognizing a transmission queuing situation of the wireless terminal, and of allocating a user channel corresponding to a transmission/reception amount on each channel and QoS by comprehensively considering a downlink channel reception situation of each user and an uplink transmission queuing situation of each uplink channel. It is thereby possible to eliminate useless channel occupations and collision of a transmission packet and transmission queuing situation reporting signal of the terminal and to perform wireless communications with high efficiency.

(Fifth embodiment)

This embodiment modified from the fourth embodiment is to provide efficient utilization of a



control channel by dividing the control channel into a dedicated control channel and a common control channel.

An example of a frame structure according to this embodiment is explained using FIG.12. In FIG.12, "1101" denotes a frame, "1102" denotes a multi control channel using a CDMA technique, "1103" denotes a user and user allocation channel using a technique such as TDMA, CDMA or OFDM, "1104" denotes an uplink/downlink particular user dedicated control channel, "1105" denotes an uplink/downlink normal user control channel (random access common channel for data and so on), "1106" denotes an uplink/downlink random access channel, "1107" denotes an uplink/downlink access and control channel, "1108" denotes a downlink user channel, "1109" denotes an uplink user channel, and "1110" denotes a variable uplink/downlink user channel boundary.

The frame according to this embodiment is provided with Ach, Cch and Uch. Cch according to this embodiment is divided into moving-picture dedicated control channel ( $C_{nd}$ ) 1104 and data common control channel ( $C_{sd}$ ) 1105.

Dedicated control channel 1104 is used in the same way as the control channel described in the embodiment described previously. Common control channel 1105 is used to transmit an uplink control signal using a random access protocol to a user having data or the like that does not require a severe delay characteristic.

Thus according to this embodiment, two kinds of



control channels are provided corresponding to a delay characteristic requirement, and therefore it is possible to assure a quality requirement of a user and to provide an efficient utilization of the control channel.

5        In addition, in the above-mentioned fourth and fifth embodiments, in the case of a mobile communication, the multi control channel is provided with the power-on access channel and channel code broadcast channel, and it is possible to acquire an access channel code of each  
10 mobile station in calling, answering and handover. Further, in other cases such as a wireless LAN, the multi control channel is not provided with the power-on access channel and channel code broadcast channel, and a control channel code of each wireless terminal is predetermined.  
15 At the time of transmission, the terminal is capable of notifying a base station of a transmission queuing situation of the terminal using a corresponding multi control channel.

      Further in the case of a mobile communication, in  
20 calling, a mobile station uses the power-on access channel only at the time the mobile station is turned on, transmits a user address or channel ID to a base station using a random access protocol, and thereby is capable of obtaining a dedicated multi control channel  
25 code. Meanwhile in answering, the base station is capable of notifying the mobile station of a code of a vacant multi control channel directly using the channel



code broadcast channel. In a handover, a handover-destination base station searches for a vacant multi control channel, and transmits a code of an allocated multi control channel to a base station currently  
5 communicating with the mobile station, and the base station is capable of notifying the mobile station of the code using the channel code broadcast channel.

Further in the above-mentioned fourth and fifth embodiments, it may be possible to adopt communication  
10 systems other than the CDMA system if a control channel could be allocated to each terminal, however, it is preferable to adopt the CDMA system in light of efficient channel utilization.

As described above, according to the present  
15 invention, it is possible to provide a wireless communication apparatus which faithfully responds to an asymmetric traffic and QoS of a user and which is capable of improving the frame utilization rate and system capacity.

20 Further, by taking advantage of the CDMA having the improved system capacity, each wireless terminal transmits to a base station a queuing reporting signal indicative of a transmission queuing situation of an uplink transmission buffer of the terminal for each frame  
25 without a collision by using a temporary dedicated control channel, and the base station is thereby capable of instantaneously recognizing the transmission queuing



situation of the wireless terminal. Further, the base station allocates a user channel corresponding to a transmission/reception amount on each channel and QoS without distinguishing between the uplink and downlink by comprehensively considering a downlink channel reception situation of each user and an uplink transmission queuing situation of each uplink channel. Accordingly it is possible to prevent the utilization of a useless channel and the occurrence of a collision of a transmission packet and another signal such as transmission request signal of the terminal and to provide a wireless communication apparatus with high efficiency.

This application is based on the Japanese Patent Applications No.HEI11-178737 filed on June 24, 1999 and No.HEI10-356409 filed on December 15, 1998, entire contents of which are expressly incorporated by reference herein.

20

#### Industrial Applicability

The present invention is preferable to be used in a field of wireless communication using ATM.



## CLAIMS

1. A wireless communication apparatus comprising:  
monitoring means for monitoring for each unit frame  
a situation of transmission queuing cell in each of  
uplink storing means and downlink storing means for each  
of a plurality of communication users; and  
allocating means for allocating a unit sub-slot to  
each transmission queuing cell for each unit frame based  
on an entire situation of the storing means.
2. The wireless communication apparatus according to  
claim 1, wherein the allocating means allocates unit  
sub-slots of which the number is in a range that the unit  
frame is capable of storing, according to a constant  
regulation.
3. The wireless communication apparatus according to  
claim 2, wherein the constant regulation includes a  
regulation such that the unit sub-slot is fairly  
allocated to each transmission queuing cell stored in  
each storing means and the transmission queuing cell  
allocated the unit sub-slot is deleted from the storing  
means.
4. The wireless communication apparatus according to  
claim 3, wherein the constant regulation includes a  
regulation such that a first circulation is repeated such  
that at an allocation occasion for each of the uplink  
storing means and the downlink storing means for each  
communication user, the unit sub-slot is allocated to



a transmission queuing cell with a longest transmission queuing time stored in each storing means.

5. The wireless communication apparatus according to claim 4, wherein the constant regulation includes a regulation such that the unit sub-slot is preferentially allocated to a particular transmission queuing cell stored in each storing means.

6. The wireless communication apparatus according to claim 5, wherein the constant regulation includes a regulation that provides between each first circulation a second circulation such that at an allocation occasion for each of the uplink storing means and the downlink storing means of each communication user, the unit sub-slot is allocated only to the particular transmission queuing cell that has the longest transmission queuing time stored in each storing means.

7. The wireless communication apparatus according to claim 6, further comprising:

arranging means for dividing all unit sub-slots allocated to transmission queuing cells for uplink and downlink respectively into an uplink sub-slot group and a downlink sub-slot group, gathering unit sub-slots allocated to each communication user at each of the uplink sub-slot group and the downlink sub-slot group into a channel, and arranging the channel on each of an uplink user channel and a downlink user channel in the unit frame.



8. The wireless communication apparatus according to claim 7, wherein the allocating means comprises comparing means for performing a comparison between the total number of stored particular transmission queuing  
5 cells and a threshold for each storing means, and performs an allocation corresponding to a result of the comparison.

9. The wireless communication apparatus according to claim 7, wherein the allocating means comprises  
10 comparing means for performing a comparison between a transmission queuing time of a stored particular transmission queuing cell and a threshold for each storing means, and performs an allocation corresponding to a result of the comparison.

15 10. The wireless communication apparatus according to claim 8, wherein the comparing means performs the comparison only to storing means for storing a particular transmission queuing cell.

11. The wireless communication apparatus according to  
20 claim 9, wherein the comparing means performs the comparison only to storing means for storing a particular transmission queuing cell.

12. The wireless communication apparatus according to claim 10, wherein the comparing means sets the threshold  
25 corresponding to a quality requirement of the particular transmission queuing cell.

13. The wireless communication apparatus according to



claim 11, wherein the comparing means sets the threshold corresponding to a quality requirement of the particular transmission queuing cell.

14. The wireless communication apparatus according to claim 1, wherein the frame is divided into a terminal transmission queuing situation reporting signal part and a user information part, and a dedicated control channel is allocated to a transmission queuing situation reporting signal of each wireless terminal.

15. The wireless communication apparatus according to claim 14, wherein a second control channel is provided besides the dedicated control channel, and both control channels are used corresponding to a delay characteristic requirement of each wireless terminal.

16. A base station provided with a wireless communication apparatus, said wireless communication apparatus comprising:

monitoring means for monitoring for each unit frame a situation of transmission queuing cell in each of uplink storing means and downlink storing means for each of a plurality of communication users; and

allocating means for allocating a unit sub-slot to each transmission queuing cell for each unit frame based on an entire situation of the storing means.

17. A communication terminal apparatus performing wireless communications with a base station apparatus provided with a wireless communication apparatus, said



wireless communication apparatus comprising:

monitoring means for monitoring for each unit frame  
a situation of transmission queuing cell in each of  
uplink storing means and downlink storing means for each  
5 of a plurality of communication users; and

allocating means for allocating a unit sub-slot to  
each transmission queuing cell for each unit frame based  
on an entire situation of the storing means.

18. The communication terminal apparatus according to  
10 claim 17, wherein the communication terminal apparatus  
reports a situation of transmission queuing cell to the  
base station.

19. A wireless communication method, comprising:

monitoring for each unit frame a situation of  
15 transmission queuing cell in each of uplink storing means  
and downlink storing means for each of a plurality of  
communication users reported from respective one of the  
plurality of communication users; and

allocating a unit sub-slot to each transmission  
20 queuing cell for each unit frame based on an entire  
situation of the storing means.

20. The wireless communication method according to  
claim 19, further comprising:

performing a comparison between the total number  
25 of stored particular transmission queuing cells and a  
threshold for each storing means; and

performing an allocation corresponding to a result



of the comparison.

21. The wireless communication apparatus according to claim 19, further comprising:

performing a comparison between a transmission  
5 queuing time of a stored particular transmission queuing cell and a threshold for each storing means; and

performing an allocation corresponding to a result of the comparison.

10 22. The wireless communication method according to claim 20, further comprising:

dividing all unit sub-slots allocated to transmission queuing cells for uplink and downlink respectively into an uplink sub-slot group and a downlink sub-slot group;

15 gathering unit sub-slots allocated to each communication user at each of the uplink sub-slot group and the downlink sub-slot group to construct a channel;

arranging the channel on each of an uplink user channel and a downlink user channel in the unit frame;

20 and

notifying said each communication user of a result of arrangement.

23. The wireless communication method according to claim 21, further comprising:

25 dividing all unit sub-slots allocated to transmission queuing cells for uplink and downlink respectively into an uplink sub-slot group and a downlink



sub-slot group;

gathering unit sub-slots allocated to each communication user at each of the uplink sub-slot group and the downlink sub-slot group to construct a channel;

5 arranging the channel on each of an uplink user channel and a downlink user channel in the unit frame; and

notifying said each communication user of a result of arrangement.



## ABSTRACT

Downlink transmission situation buffer 601 stores information on downlink transmission queuing cell for each communication terminal. Uplink transmission  
5 situation buffer 603 stores information on uplink transmission queuing cell for each communication terminal. Based on the information stored in uplink transmission situation buffer 603 and the information stored in downlink transmission situation buffer 601,  
10 channel allocating section 602 allocates a unit sub-slot fairly to each transmission queuing cell.



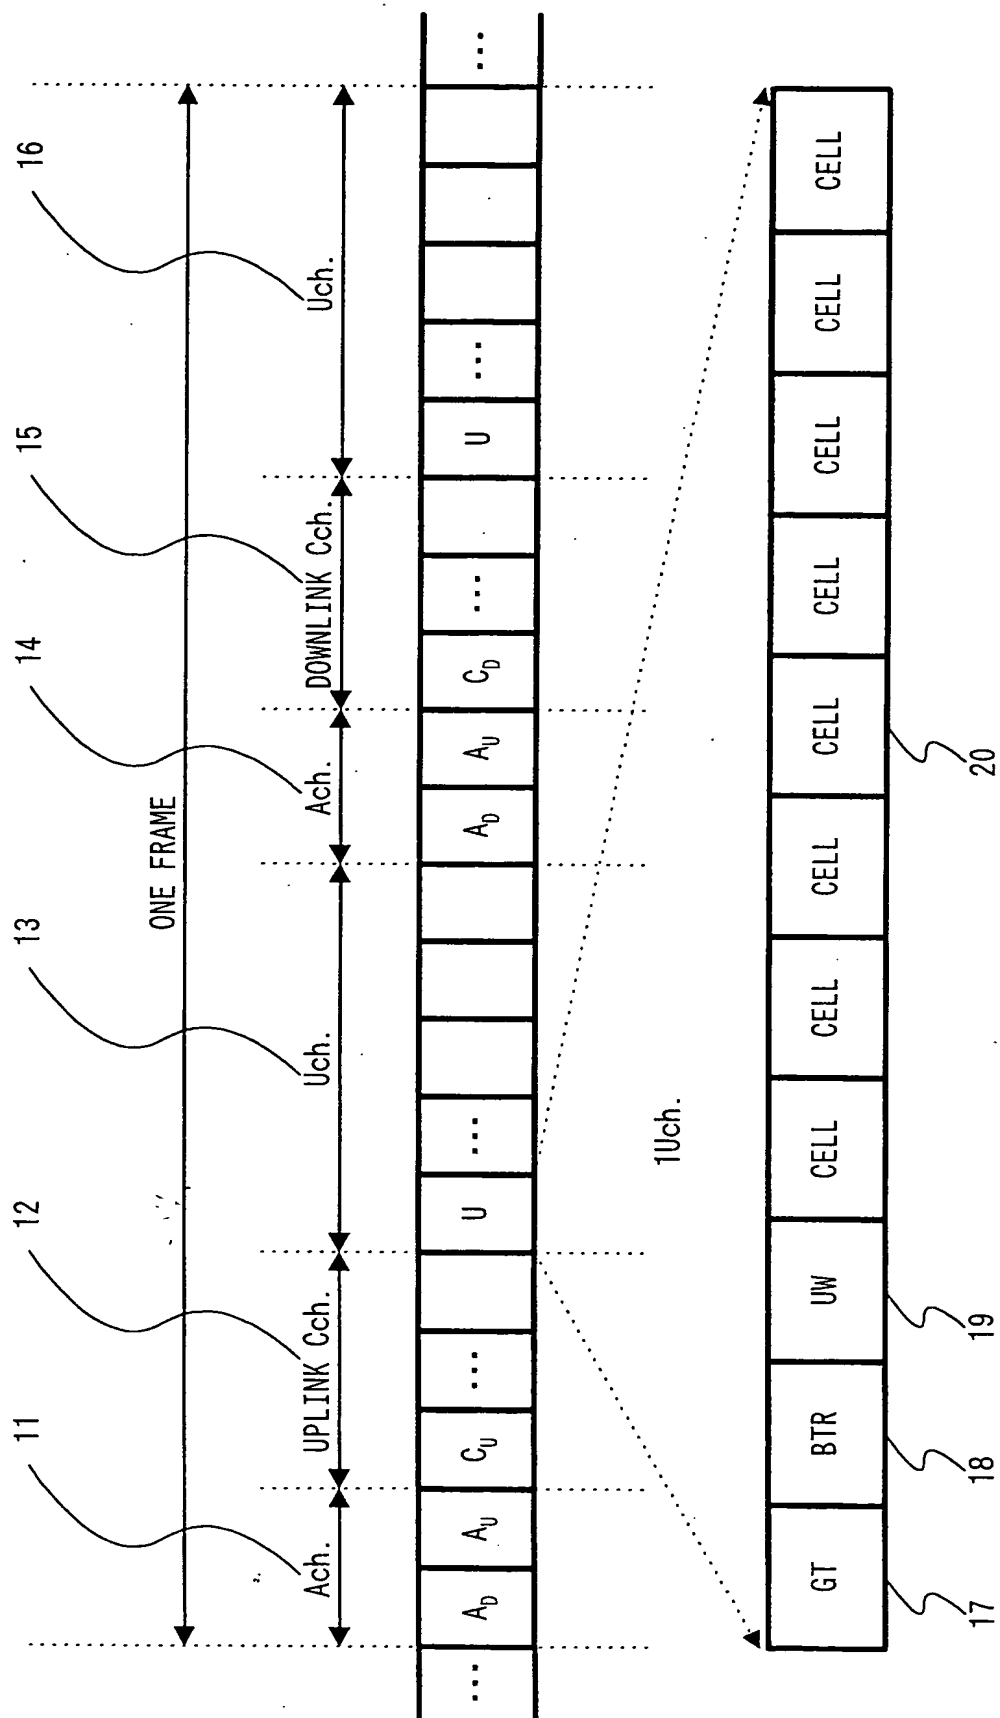


FIG. 1



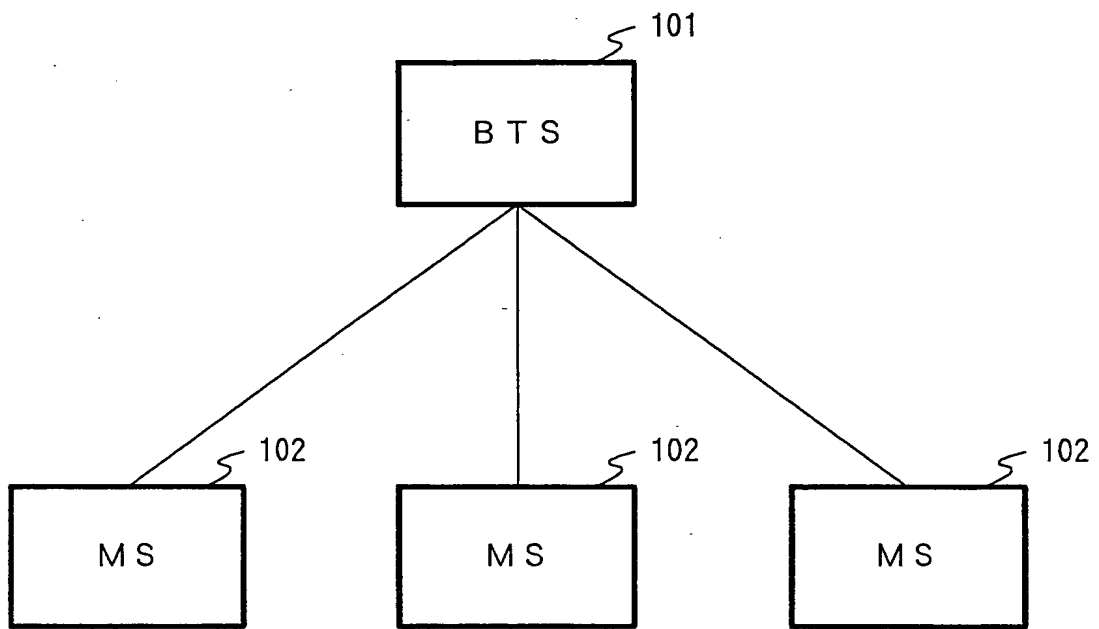


FIG. 2



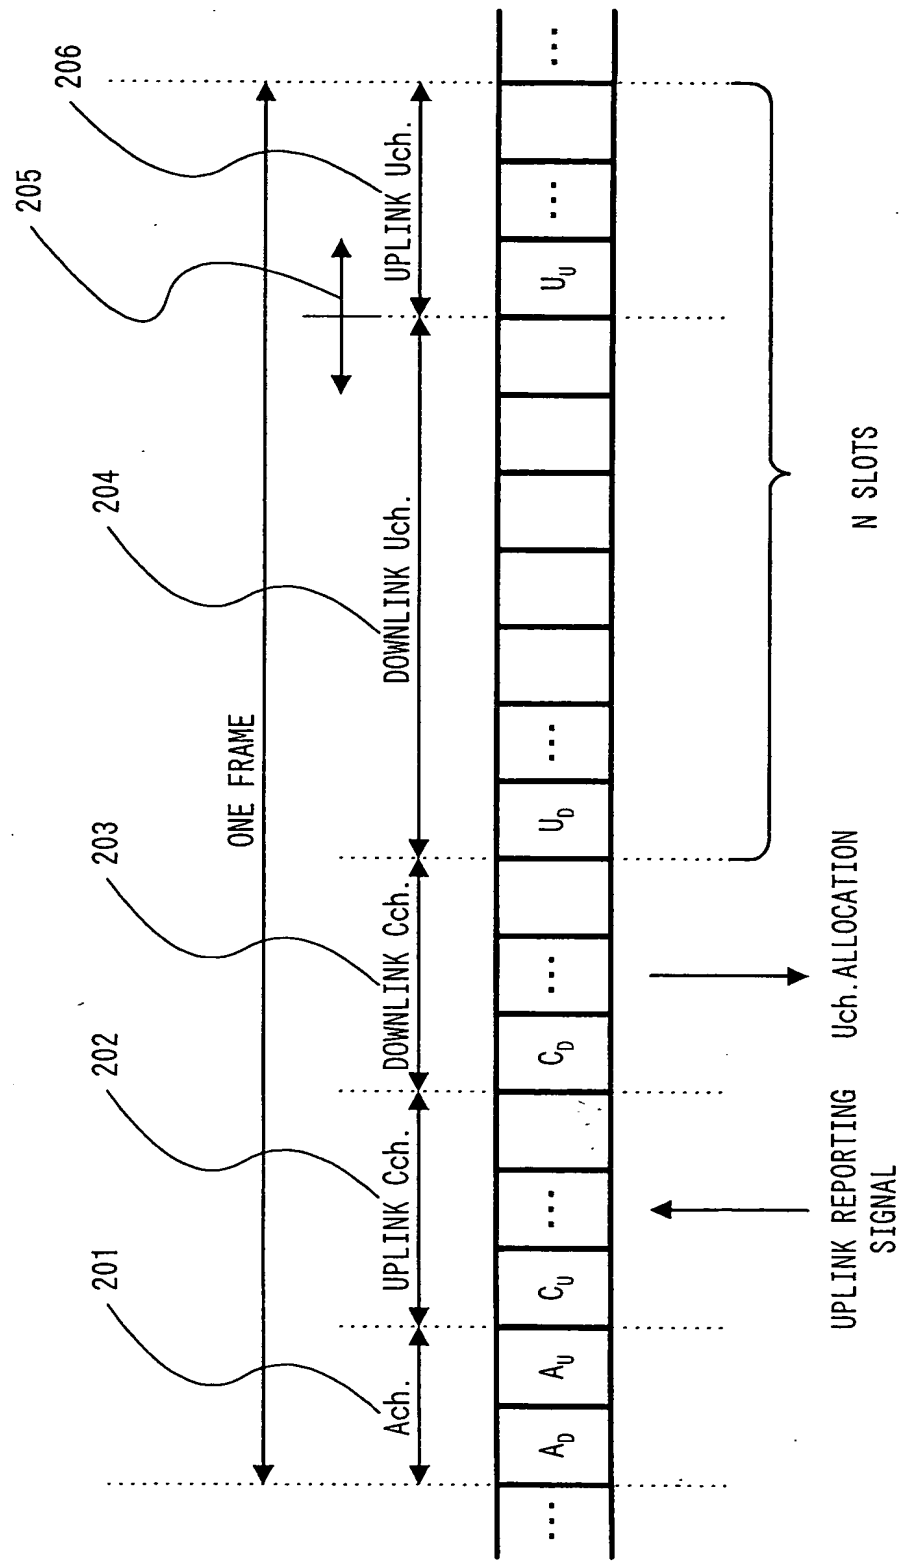


FIG. 3



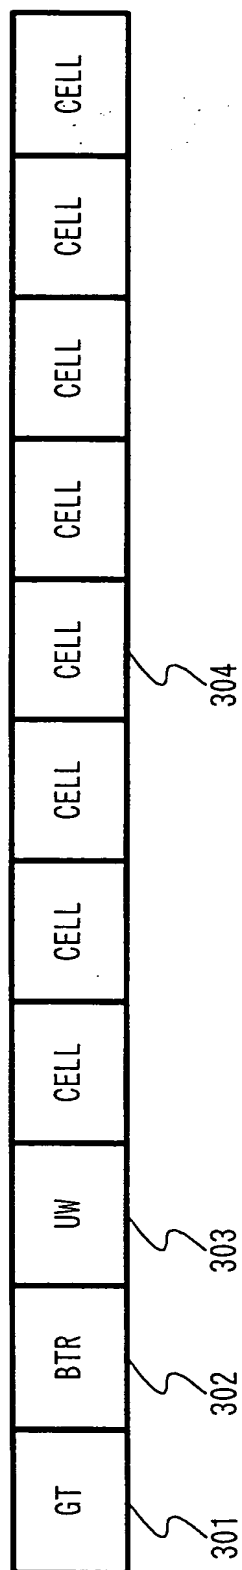


FIG. 4



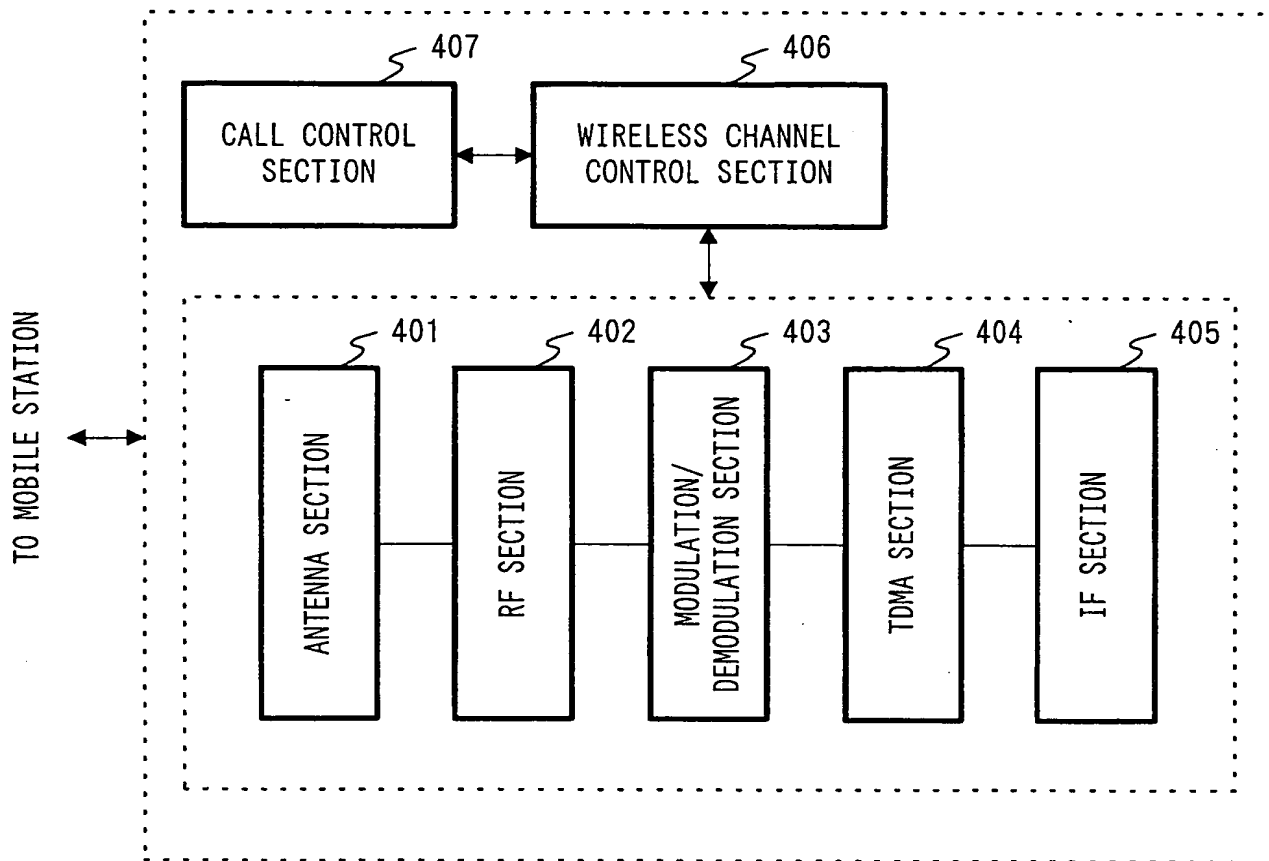


FIG. 5



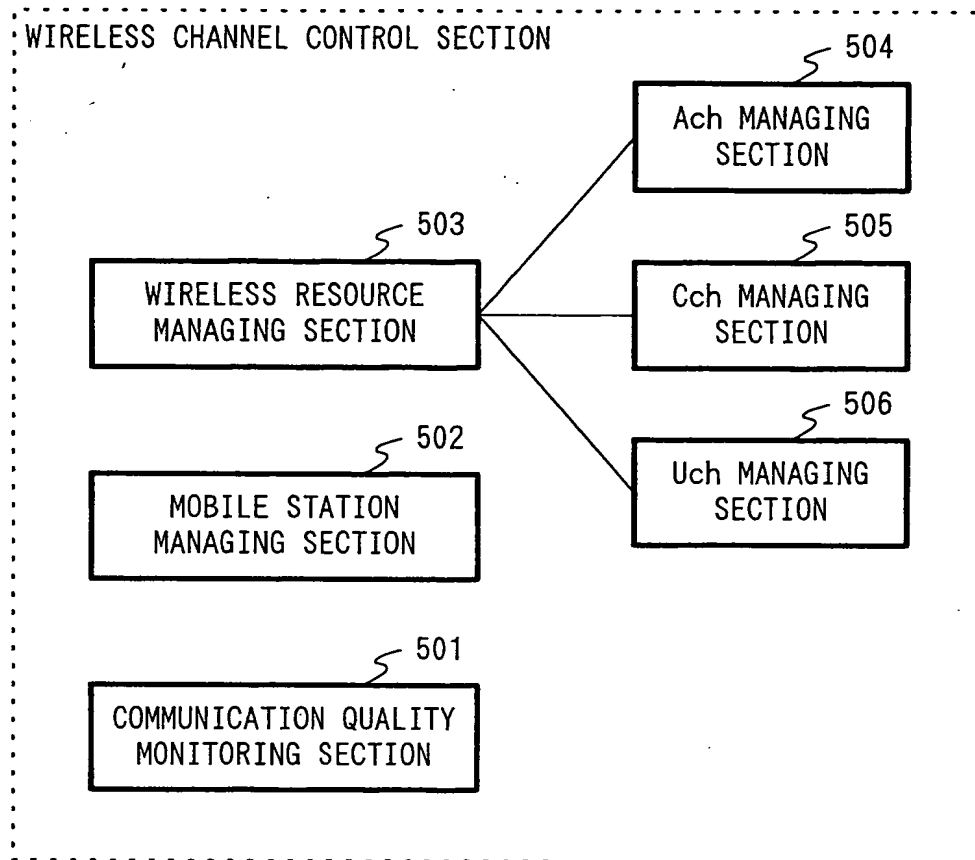


FIG. 6



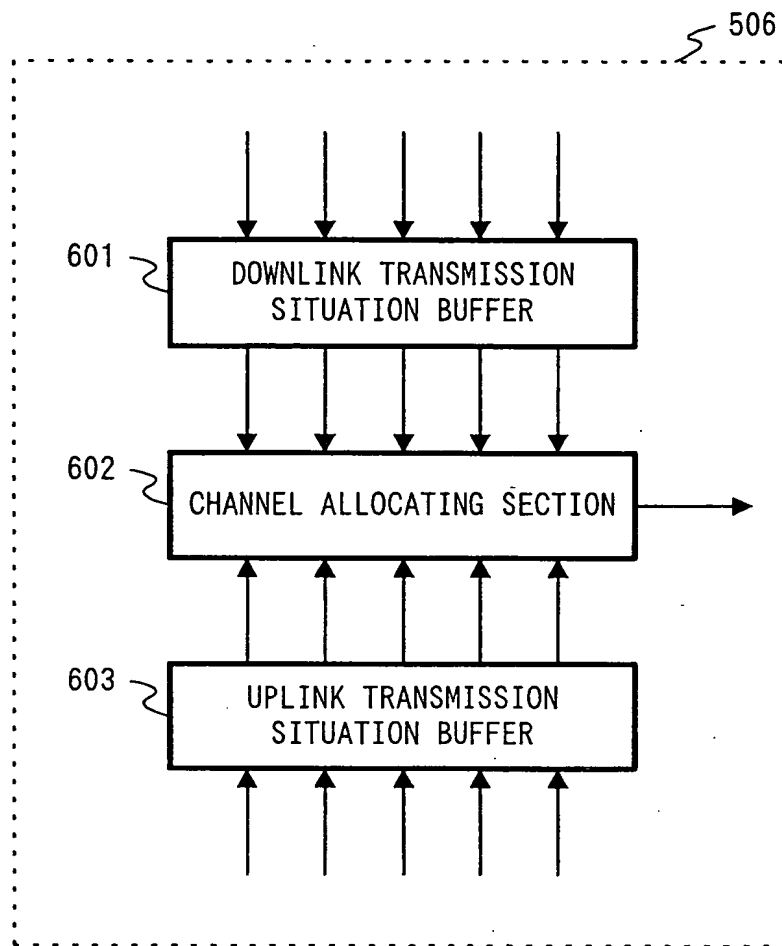


FIG. 7



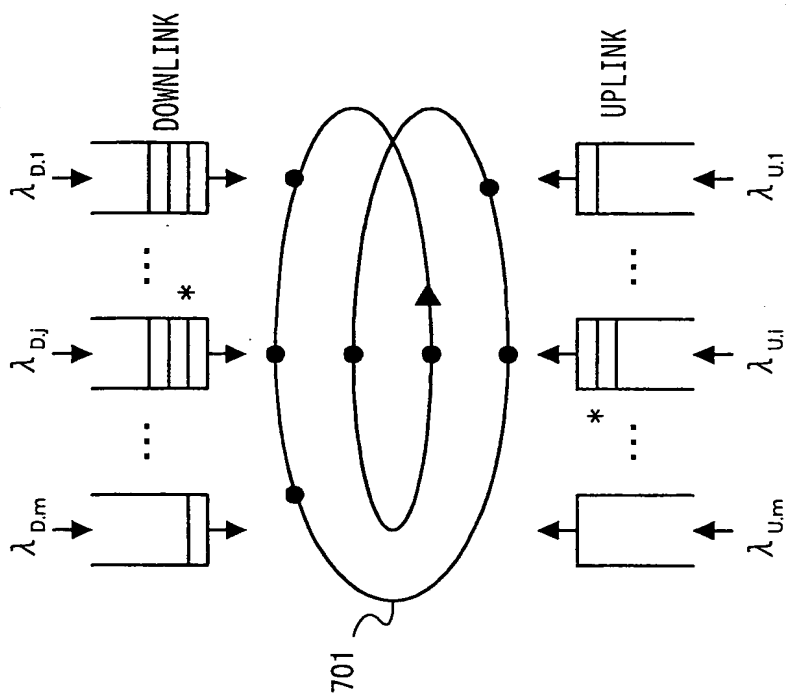


FIG. 8A

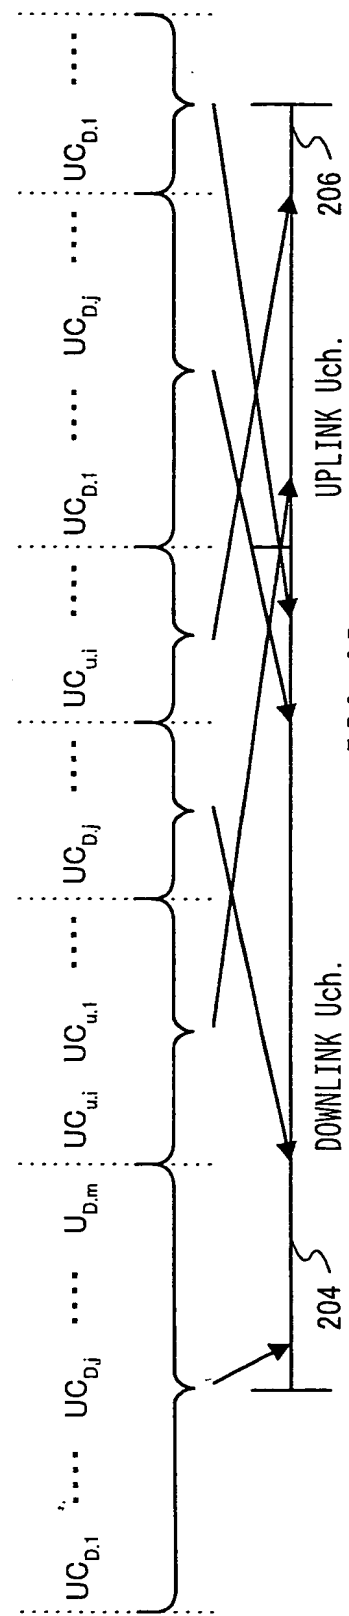


FIG. 8B



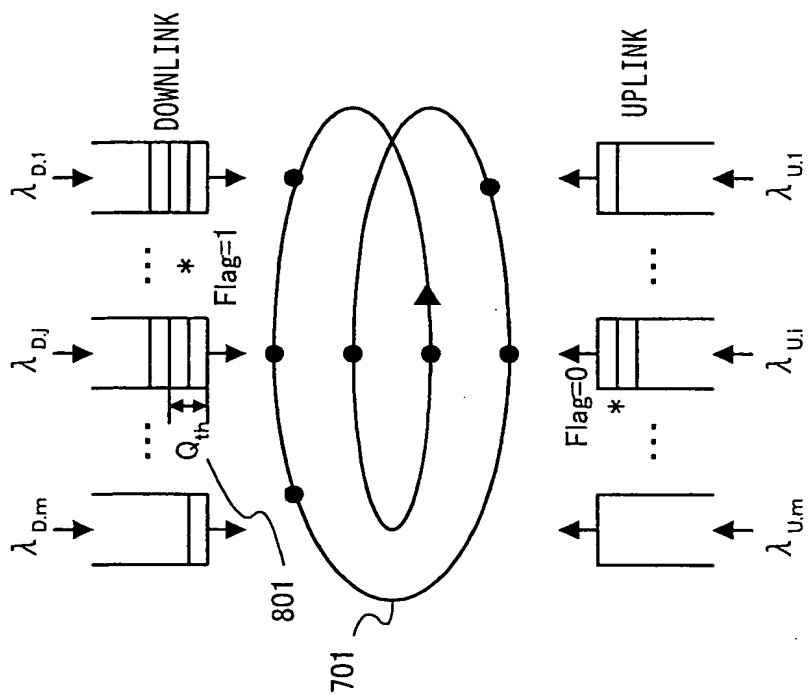


FIG. 9A

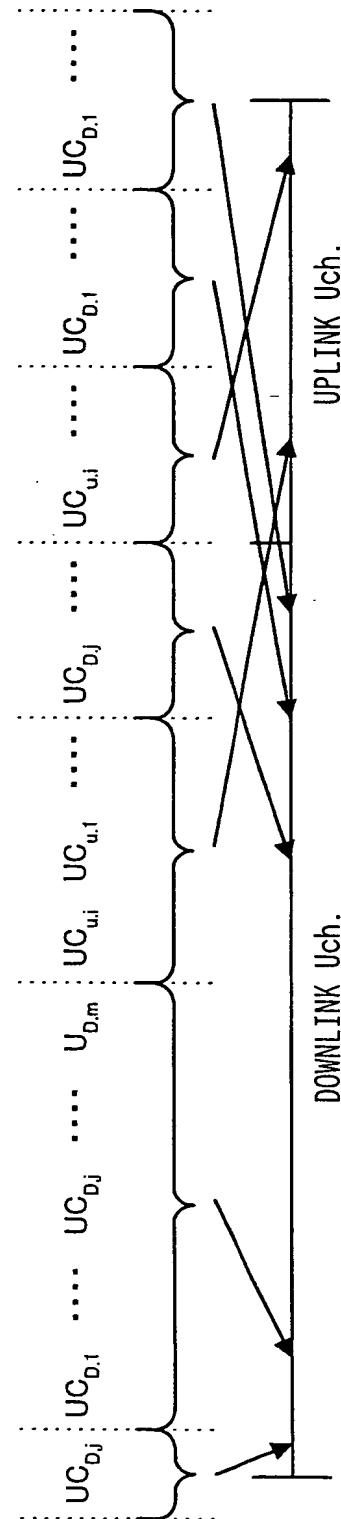


FIG. 9B



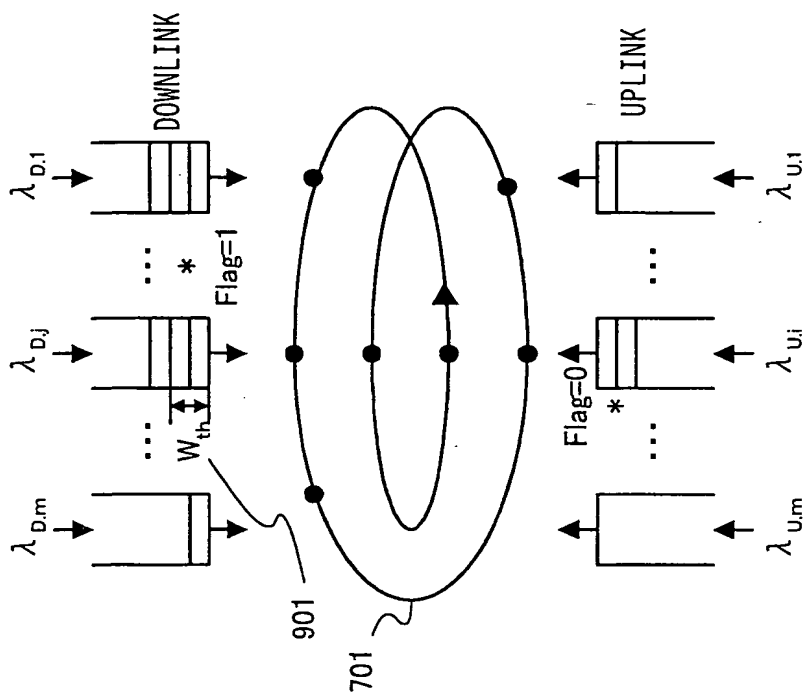


FIG. 10A

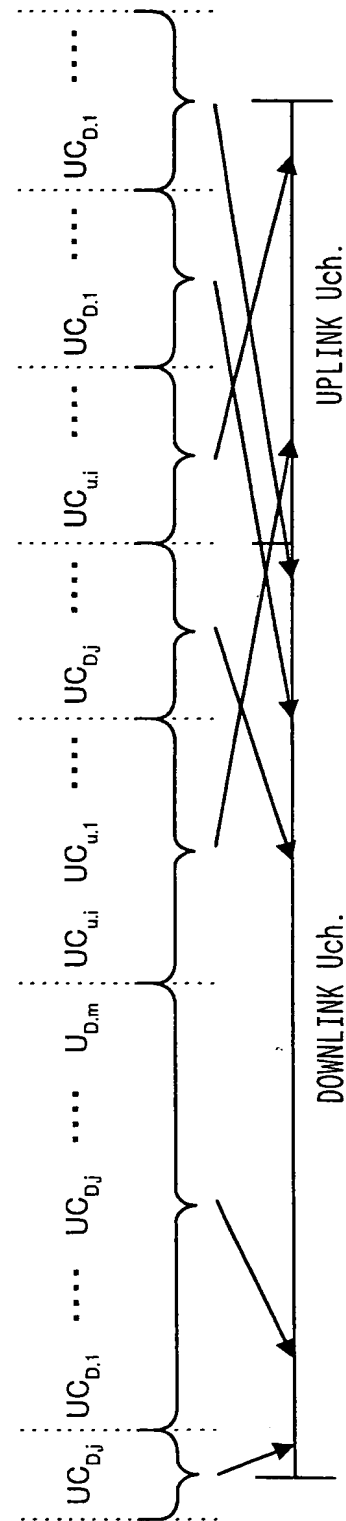


FIG. 10B



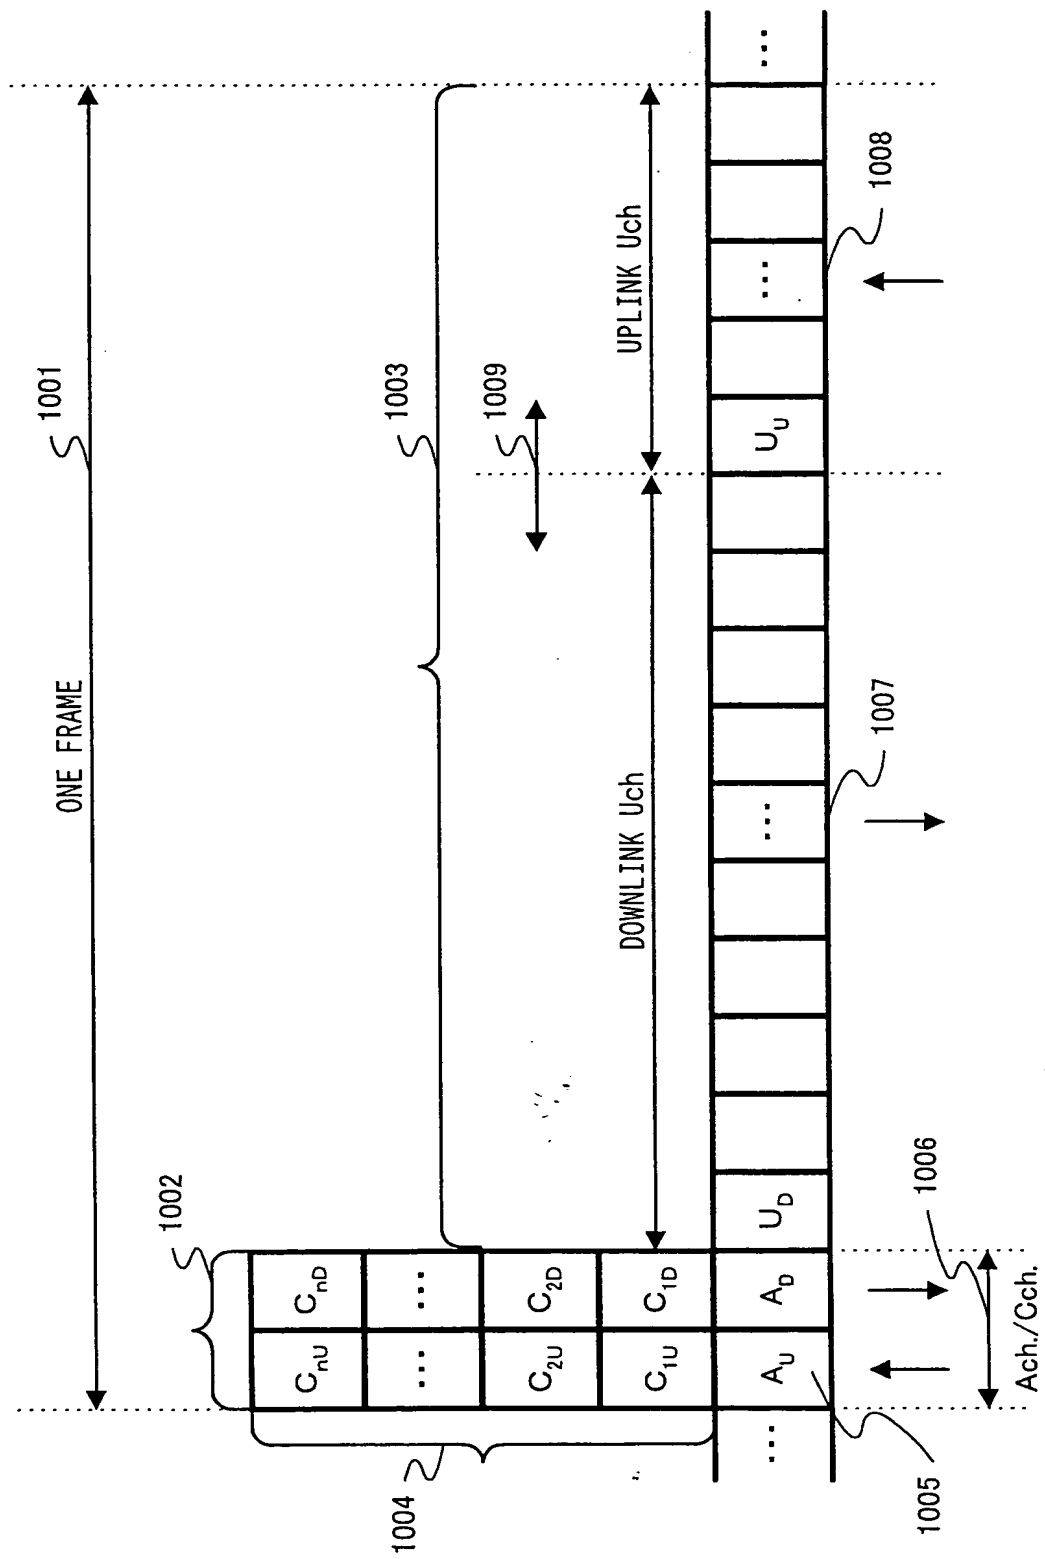


FIG.11




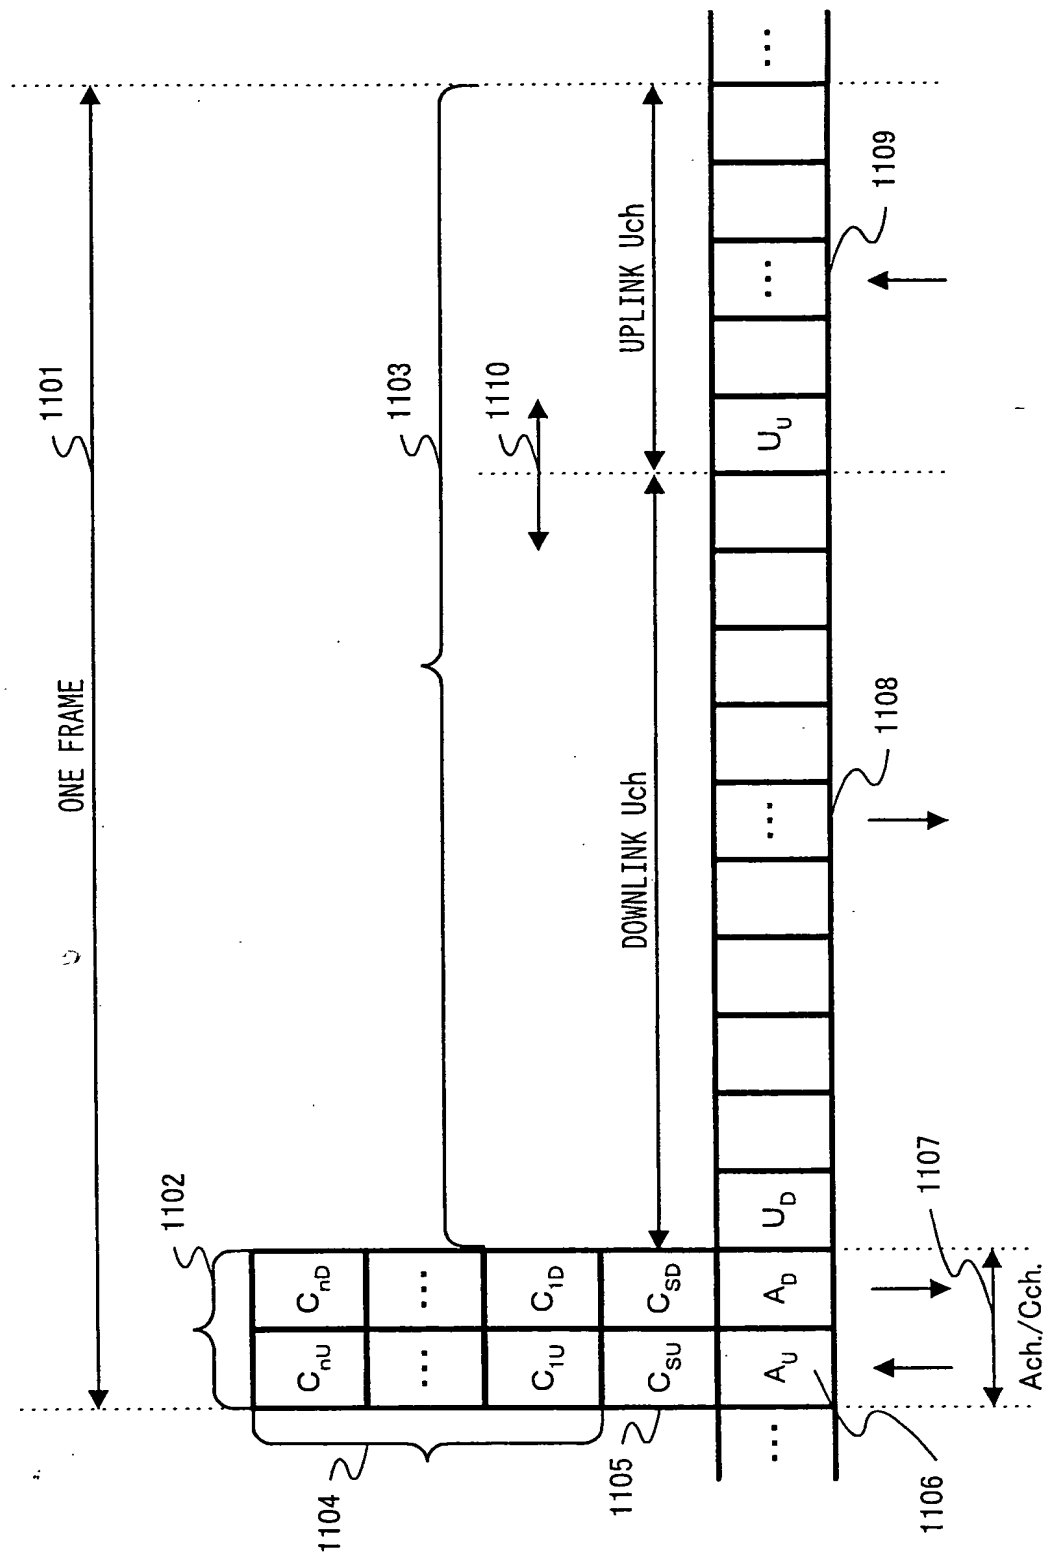


FIG.12



EXHIBIT E

1 9 6 0 0 0 4

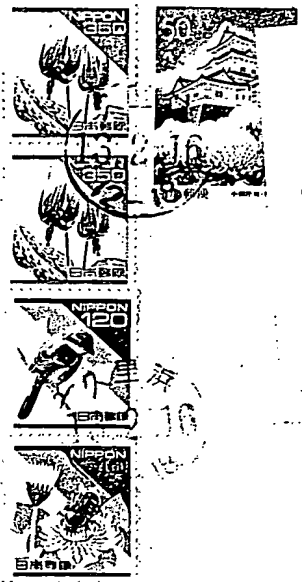

\*お知らせ番号\*  
36-2202



配達日

2月7日 19時  
保管期間は2月24日まで

この郵便物は、郵便規則第九十条の規定による七日間の留置期間が経過しましたのでおかしいます。




-4-18

リ-ンビル あきしま 104

日付印



様



135-27-46630-4

# National/Panasonic

## 松下通信工業株式会社

- |   |           |                  |                      |
|---|-----------|------------------|----------------------|
| <input type="checkbox"/> 本社事務所            | 〒105-8586 | 東京都港区芝大門一丁目1番30号 | ナショナル6号館             |
| <input type="checkbox"/> 綱島地区             | 〒223-8639 | 横浜市港北区綱島東四丁目3番1号 | 電話 (045)531-1231(代表) |
| <input type="checkbox"/> 佐江戸地区            | 〒224-8539 | 横浜市都筑区佐江戸町600番地  | 電話 (045)932-1231(代表) |
| <input checked="" type="checkbox"/> YRP地区 | 〒239-0847 | 神奈川県横須賀市光の丘5-3   | 電話 (0468)47-1231(代表) |
| <input type="checkbox"/> 松本地区             | 〒399-8730 | 長野県松本市大字笹賀5652番地 | 電話 (0263)26-1231(代表) |
| <input type="checkbox"/> 白河地区             | 〒961-0835 | 福島県白河市白坂字牛清水15番地 | 電話 (0248)28-2231(代表) |
| <input type="checkbox"/> 花巻地区             | 〒025-0303 | 岩手県花巻市大畑第九地割92番4 | 電話 (0198)26-2231(代表) |
| <input type="checkbox"/> 静岡地区             | 〒436-0082 | 静岡県掛川市淡陽18番地     | 電話 (0537)23-1121(代表) |

担当事業部 部課名

技術管理課





(English Annotation)

**PROOF OF DELIVERY**

\* Reference No. \* 36-2202

This mail is returned to a sender since a custodial period of seven days under Article 90 of Post Office Rule expired.

Remarks

Delivery Date: February 17, 2001 19:00  
Custodial Period: February 24, 2001

Sender: Matsushita Communication Industrial Co., Ltd.

Recipient: Mr. Guizeng Shi  
4-4-18-104, Midori-cho, Akishima-shi, Tokyo 196-0004